



# Meridian™ 2

User guide and technical specification

# Meridian 2

## User guide

### Contents

Section	Page no
<b>Preface</b>	<b>3</b>
Contact details .....	3
Use of the product.....	3
Purpose and disclaimer .....	3
Copyright in this guide .....	3
Data copyright and other intellectual property rights .....	4
Trademarks.....	4
Back-up provision of the product .....	4
Using this guide.....	4
<b>Chapter 1 Introduction .....</b>	<b>5</b>
OS OpenData™ .....	5
Meridian 2 features .....	5
Applications of Meridian 2.....	5
What you need to use Meridian 2 .....	6
Computer hardware .....	6
Computer software.....	6
Supply .....	6
Meridian 2 supply.....	6
Meridian 2 supply formats.....	6
Meridian 2 supply media.....	6
<b>Chapter 2 High-level product overview .....</b>	<b>8</b>
Source of Meridian 2.....	8
Currency.....	8
Accuracy and resolution.....	8
Completeness .....	9
Meridian general specifications.....	9
<b>Chapter 3 The National Grid .....</b>	<b>10</b>
<b>Chapter 4 Data measures.....</b>	<b>11</b>
<b>Chapter 5 Metadata.....</b>	<b>11</b>
<b>Annexe A Product and service performance report form .....</b>	<b>12</b>

v6.0 – 11/2013

D05300\_01

## Preface

This user guide (hereafter referred to as the guide) is designed to provide an overview of Meridian 2 (hereafter referred to as the product) and it gives guidelines and advice on how a customer might derive the maximum benefit from the product. It assumes a general knowledge of geographic information. If you find an error or omission in this guide, or otherwise wish to make a comment or suggestion as to how we can improve it, please contact us at the address shown below or complete the product and service performance report form at [annexe A](#) and return it to us.

## Contact details

Our Customer Service Centre will be pleased to deal with your enquiries:

Customer Service Centre  
Ordnance Survey  
Adanac Drive  
SOUTHAMPTON  
SO16 0AS

General enquiries (calls charged at local rate): +44 (0)8456 05 05 05

Dedicated Welsh Language HelpLine: 08456 05 05 04

Textphone (deaf and hard of hearing users only please): +44 (0)23 8005 6146

[customerservices@ordnancesurvey.co.uk](mailto:customerservices@ordnancesurvey.co.uk)

[www.ordnancesurvey.co.uk](http://www.ordnancesurvey.co.uk)

This document has been screened in accordance with Ordnance Survey's *Equality scheme*. If you have difficulty reading this information in its current format and would like to find out how to access it in a different format (Braille, large print, computer disk or in another language), please contact us on: +44 (0)8456 05 05 05.

## Use of the product

The product is made available to you and your organisation on the terms of the OS OpenData™ Licence at <http://www.ordnancesurvey.co.uk/business-and-government/products/opendata-products.html>

If there is any inconsistency between the terms of the licence and this guide, the terms of the licence prevail.

## Purpose and disclaimer

This guide is provided for guidance only and does not constitute any warranty, representation, undertaking, commitment or obligation (express or implied) about the product or its suitability for any particular purpose. It is your responsibility to ensure that this product is suitable for your intended purpose.

Ordnance Survey does not accept any liability (whether for breach of contract, negligence or otherwise) for any loss or liability you or any third party may suffer in relying on this guide and any guidance, suggestion, advice or explanation provided in it. Ordnance Survey's liability to you in relation to the product is limited, as set out in the OS OpenData Licence.

We may change the information in this guide at any time without notice.

We do not accept responsibility for the content of any third party websites, referenced in, or accessed through, this guide or through the Ordnance Survey website.

## Copyright in this guide

This guide is © Crown copyright 2012.

You may copy or distribute any part of this guide to support the use of OS OpenData, including for your personal use, use in your organisation or business, or for use with, or incorporation in, your product or application.

## Data copyright and other intellectual property rights

The Crown (or, where applicable, Ordnance Survey's suppliers) owns the intellectual property rights in the data contained in this product. You are free to use the product on the terms of the OS OpenData Licence, but must acknowledge the source of the data by including the following attribution statement: Contains Ordnance Survey data © Crown copyright and database right 2012.

## Trademarks

Ordnance Survey, the OS Symbol, Land-Form PANORAMA, OS MasterMap, Landranger and Strategi are registered trademarks and OS OpenData, Boundary-Line and Meridian are trademarks of Ordnance Survey, the national mapping agency of Great Britain.

Adobe and Reader are registered trademarks of Adobe Systems Incorporated.

AutoCAD and Autodesk are registered trademarks and DXF is a trademark of Autodesk Incorporated.

ArcInfo, ArcGIS and Esri are registered trademarks of Environmental Systems Research Institute Inc.

MapInfo is a registered trademark of Pitney Bowes MapInfo Corporation.

Arial and Times New Roman are registered trademark of The Monotype Corporation.

## Back-up provision of the product

You are advised to copy the supplied data to a backup medium.

## Using this guide

The documentation is supplied in portable document format (PDF) only. Free Adobe® Reader® software, which displays the guide, incorporates search and zoom facilities and allows you to navigate within. Hyperlinks are used to navigate between associated parts of the guide and to relevant Internet resources by clicking on the blue hyperlinks and the table of contents.

If you are unfamiliar with any words or terms used and require clarification please refer to the [glossary](#) at the end of the document.

# Chapter 1 Introduction

The concepts of Meridian 2 are explained fully in [chapter 2](#).

Meridian™ 2 is supplied as data only and does not include software for data viewing or manipulation. Meridian 2 is supplied in DXF™ and will require specific software such as a geographical information system (GIS) or computer-aided design (CAD).

Meridian 2 is also available as data in MID/MIF and Shapefile formats, which require specific software such as MapInfo® Professional or Esri® ArcGIS®.

The database is derived from Ordnance Survey's existing large- and small-scale digital databases.

The nominal viewing scale is 1:50 000.

## OS OpenData™

On 1 April 2010 Meridian 2 was made available as part of OS OpenData in DXF, ESRI Shapefile and TAB formats. Prior to the release of OS OpenData, Meridian 2 was available as a licensed product and formats included NTF and MID/MIF. This user guide and technical specification includes all formats in order to support new and existing users. Please refer to [Meridian 2 supply options](#) in this user guide.

## Meridian 2 features

- Meridian 2 has feature codes that allow everything in the database to be allocated to a specific category; users can group like features for search, display and output routines.
- Meridian 2 is defined as a limited link-and-node structure within each layer. It contains points, lines and nodes. Nodes have pointers to lines that join at the node and, similarly, there are lines that enclose an area containing a point. Some points are not contained within areas enclosed by lines.
- Department for Transport (DfT) road classification numbers are stored in attribute records and are applied to features such as roads. Names applying to administrative areas and developed land use areas are also included in the attribute record of the appropriate point feature.
- Annual updating of many of the source databases ensures that high standards of currency and integrity are maintained. The road network in Meridian 2 is a derived and simplified network that has been produced from the Ordnance Survey Roads database.

## Applications of Meridian 2

There are many potential applications for Meridian 2. These include:

- Environmental analysis
- Flood areas analysis
- Land management
- Commercial and/or business site development
- Retail and/or wholesale trades
- Distribution networks:
  - store and/or warehouse locations
  - strategic business expansion and/or development
- Marketing and media planning:
  - sales force locations and/or territories
  - sales prospecting
  - market analysis of customers, competitors or outlet densities
  - market analysis of direct mail responses
  - poster distribution
  - TV and/or radio advertising regions
  - product and/or brand promotion campaigns

- Financial/insurance
  - customer bases
  - high/low-risk areas
- Health:
  - community health
  - health black spots
- Leisure activities:
  - large site planning, for example, golf courses
  - tourism
  - theme park locations

## What you need to use Meridian 2

### Computer hardware

This product may be used on a wide range of hardware platforms (provided sufficient memory and storage facilities are available), varying from desktop PCs using GIS or CAD to mainframe computers with specialised translators and applications.

### Computer software

Meridian 2 is supplied as inert data and does not include software for data manipulation. To fully exploit the potential of Meridian 2, it is necessary to use appropriate application software such as GIS or CAD.



DXF is designed for use with Autodesk® Ltd CAD software, particularly AutoCAD®. The parameters defining colours, line styles, text styles, symbols and so on are embedded within the DXF file, as is customary with this CAD format.

**Please check with your supplier if you are unsure of your CAD system's compatibility with Meridian 2.**

Meridian 2 is also available as data in MID/MIF and Shapefile formats, which require specific software such as MapInfo Professional or ArcGIS.

## Supply

### Meridian 2 supply

- Combined theme: all layers.

*NOTE: gridded height is supplied with the Meridian 2 supply options but on a separate CD.*

All themes are available as:

- Complete national cover of Great Britain (2,848 tiles)

(These areas correspond with Nomenclature des Unites Territoriales Statistique (NUTS) Level 1 Areas.)

- 10 km by 10 km DXF tiles.

### Meridian 2 supply formats

Meridian 2 is available in the following formats for OS OpenData:

- DXF (conforming to AutoCAD release 12 with extended entity data)
- Shapefile (Esri)

### Meridian 2 supply media

Data is supplied on DVD or as an online download for OS OpenData customers.

Data supply structures:

### **MID/MIF Root directory**

- |\_Doc
- | |\_ MERIDIAN2\_RELEASE\_1\*\_2011\*\*\_CHANGE.TXT
- | |\_ Styling\_Guide.doc
- |\_Data
- |\_Data files

### **DXF Root directory**

- |\_Doc
- | |\_ MERIDIAN2\_RELEASE\_1\*\_2011\*\*\_CHANGE.TXT
- | |\_ Styling\_Guide.doc\*\*\*|\_Data
- |\_100k Folder structure (for example, TQ)
- |\_Data files

### **SHAPE Root directory**

- |\_Doc
- | |\_ MERIDIAN2\_RELEASE\_1\*\_2011\*\*\_CHANGE.TXT
- | |\_ Styling\_Guide.doc
- |\_Data
- |\_cartotext
- |\_info
- |\_Data files

\*This number will change to reflect the issue

\*\*The year changes to reflect the year of release.

\*\*\*The Styling\_Guide is only relevant for TAB and Shape formats but has been supplied with all formats.

## Chapter 2 High-level product overview

### Source of Meridian 2

Meridian 2 data are derived from large-scale and small-scale digital databases. The data capture source and scales are:

Feature	Original data source	Source scales
Road network	Roads centrelines Ordnance Survey Roads database	1:1250, 1:2500 and 1:10 000
Railways	Large-scale database	1:1250, 1:2500 and 1:10 000
County, district and London boroughs for England	Boundary-Line™	1:10 000
Unitary authority areas for Wales	Boundary-Line	1:10 000
Unitary authority areas for Scotland	Boundary-Line	1:10 000
Coastline	Landranger®	1:50 000
Developed land use areas and place names	Strategi®	1:250 000
Hydrology	Strategi	1:250 000
Woodlands	Strategi	1:250 000
Gridded height	Land-Form PANORAMA®	1:50 000
Cartographic text	Strategi	1:250 000

### Currency

Meridian 2 data is derived from the latest available versions of Ordnance Survey's databases. The Meridian 2 dataset will be refreshed twice a year.

The large- and small-scale databases are controlled by the revision criteria for topography that are defined by Ordnance Survey for the various geographical areas.

### Accuracy and resolution

The resolution of the data supplied is 1 metre. Meridian 2 data retains the same accuracy as the source data during its capture; however, it is not possible to calculate meaningful accuracy criteria for these data due to different source databases.

The Ordnance Survey Roads database used to have a 20 metre filter applied to the centreline, which was supplied to a 1 metre resolution. Since the source data of Meridian 2 has changed, this 20 metre rule no longer applies as the source data is intrinsically more accurate.

During the updating of the road data, there is a comparison buffer created – around the existing road data – to detect change. This buffer is set to 3 metres either side of a feature, 5 metres at each end, and 10% of the length.

Administrative areas have a 20 metre lateral filter applied to the boundary. The 20 metre filter does not affect the positional accuracy of node points.

Features derived from the small-scale databases have been subjected to generalisation – information is cartographically represented in areas where accurate positional representation would cause confusing clutter on the viewed image. To maintain positional relationships, such data has been further adjusted to fit the hierarchy where necessary.



## Completeness

During production, many checks are undertaken to ensure that data supplied to customers are both accurate and complete. During digital manipulation in creating the upgraded data, all sources of that data are checked against specification documentation to identify whether any features have been omitted or misaligned.

These quality control checks take the form of:

- visual checks by operators;
- independent quality assurance checks; and
- computer validation with the specification.

## Meridian general specifications

The following gives details of the product specification identity and its relationship to Ordnance Survey data capture specifications. Version details of these specifications are also stated.

<b>Product</b>	<b>Product specification</b>		
Meridian 2			
Transfer format specifications			
Name	DXF (Release 12)	Shape	MID/MIF
Level			
Version	1		
Issue date	1 January 1997		


## Chapter 3 The National Grid

Meridian 2 tiles are identified by quoting the National Grid reference of the south-west corner of the area they cover. The Ordnance Survey National Grid divides Great Britain into squares 100 km by 100 km. Each of these squares has a unique two-letter reference, for example, TG in the diagram below.

Each Meridian 2, 10 km by 10 km tile is described by adding a two-digit reference to the 100 km by 100 km square reference, with the easting first followed by the northing, for example, TG23.

For additional information on how to use the National Grid, visit Ordnance Survey's website at:

<http://www.ordnancesurvey.co.uk/>

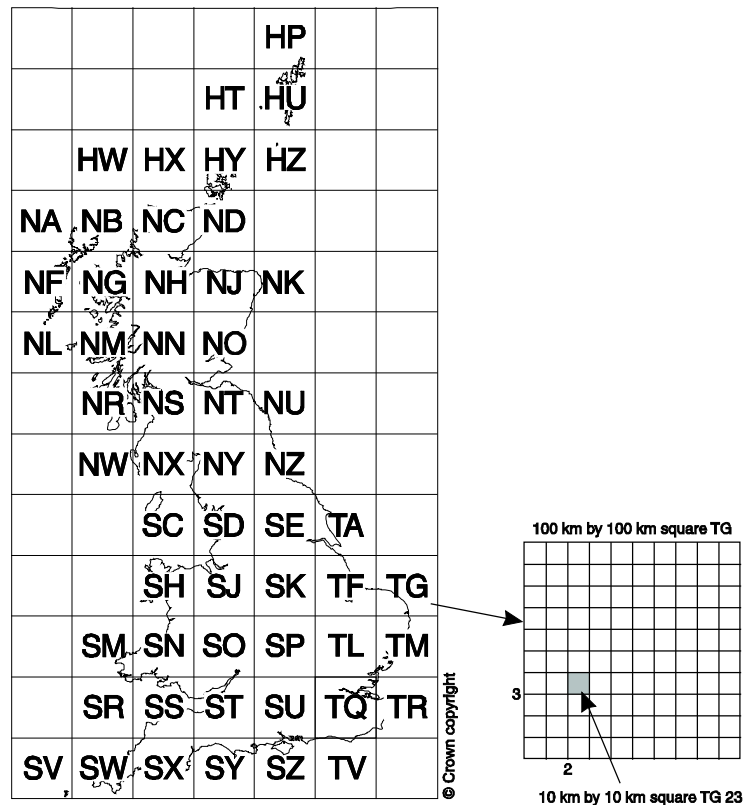

## Chapter 4 Data measures

Ordnance Survey measures the data in its products in one or more of the ways set out in table 1 below.

**Table 1** Definitions of data measures

Data measure	Definition	Sub-measure	Definition
<b>Completeness</b>	Presence and absence of features against the specified data content*	Omission	Features representing objects that conform to the specified data content but are not present in the data
		Commission	Features representing objects that do not conform to the specified data content but are present in the data
<b>Logical consistency</b>	Degree of adherence to logical rules of data structure, attribution and relationships	Conceptual consistency	How closely the data follows the conceptual rules (or model)
		Domain consistency	How closely the data values in the dataset match the range of values in the dataset specification
		Format consistency	The physical structure (syntax): how closely the data stored and delivered fits the database schema and agreed supply formats
		Topological consistency	The explicit topological references between features (connectivity) – according to specification
<b>Positional accuracy</b>	Accuracy of the position of features	Absolute accuracy	How closely the coordinates of a point in the dataset agree with the coordinates of the same point on the ground (in the British National Grid reference system)
		Relative accuracy	Positional consistency of a data point or feature in relation to other local data points or features within the same or another reference dataset
		Geometric fidelity	The 'trueness' of features to the shapes and alignments of the objects they represent*
<b>Temporal accuracy</b>	Accuracy of temporal attributes and temporal relationships of features	Temporal consistency	How well ordered events are recorded in the dataset (life cycles)
		Temporal validity (currency)	Validity of data with respect to time: the amount of real-world change that has been incorporated in the dataset that is scheduled for capture under current specifications
<b>Thematic accuracy (attribute accuracy)</b>	Classification of features and their attributes	Classification correctness	How accurately the attributes within the dataset record the information about objects*

\*When testing the data according to the dataset specification against the 'real world' or reference dataset.

## Chapter 5 Metadata

ISO compliant metadata is available for the data and can be found on the [Ordnance Survey website](#).

## Annexe A Product and service performance report form

Ordnance Survey welcomes feedback from its customers about Meridian 2.

If you would like to share your thoughts with us, please print a copy of this form and when completed post or fax it to the address below.

Your name: .....

Organisation: .....

Address: .....

.....

.....

Postcode: .....

Phone: .....

Fax: .....

Email: .....

Quotation or order reference: .....

Please record your comments or feedback in the space below. We will acknowledge receipt of your form within three (3) working days and provide you with a full reply or a status report within 21 working days.

If you are posting this form, please send it to:

Meridian 2 Product Manager, Ordnance Survey, Adanac Drive, SOUTHAMPTON, SO16 0AS.

If you wish to return it by fax, please dial 023 8005 6159.

Any personal information that you supply with this report form will be used by Ordnance Survey only in the improvement of its products and services. It will not be made available to third parties.

# Meridian 2

## Technical specification

### Contents

Section	Page no
<b>Introduction</b>	<b>15</b>
Purpose of this specification and disclaimer	15
Copyright in this specification	15
Data copyright and other intellectual property rights	15
<b>Chapter 1</b>	<b>Overview of Meridian 2</b> ..... <b>16</b>
Using this technical specification	16
Data overview	16
Basic principles	16
Meridian 2 vector data structure	16
<b>Chapter 2</b>	<b>Meridian explained</b> ..... <b>18</b>
Features	18
Points and lines	18
Feature position	19
Feature attribute data	20
Feature codes	20
Names as attributes	20
Road number (RN) attribute	20
Trunk road (TR) attribute	20
Line length (LL) attribute	20
OSODR attribute	20
Link level at node	21
Proper name (PN) attribute	21
Roundabout (RT) attribute	21
Junction name (JN) attribute	22
Settlement name (SN) attribute	22
Unique identifiers	22
Feature layer descriptions	23
<b>Chapter 3</b>	<b>DXF explained</b> ..... <b>26</b>
An overview of Meridian 2 in DXF	26
DXF	26
Structure of Meridian 2 in DXF	26
Line features	26
Area features	26
Name features	27
Drawing content and format	27
Coordinate system	27
Height	27
Layer names	27
Neatline	27
Grid	27
Grid values	27
Meridian 2 DXF layers	28
DXF footnotes	30
<b>Chapter 4</b>	<b>DXF file structure for Meridian 2</b> ..... <b>31</b>
General	31
Data structure	31
Header	32
Tables	34
Blocks	38
Entities section	39
End of File group	43
<b>Chapter 5</b>	<b>An overview of Meridian 2 in MID/MIF</b> ..... <b>44</b>
Meridian 2 is available in MID/MIF	44
Structure of Meridian 2 in MapInfo	44

	Line features .....	44
	Area features .....	44
	Names features.....	44
	Drawing content and format.....	45
	Coordinate system .....	45
	Height.....	45
	Layer names .....	45
	Neatline.....	45
	Grid .....	45
	Grid values.....	45
	Styling .....	45
<b>Chapter 6</b>	<b>An overview of Meridian 2 in ESRI Shapefile.....</b>	<b>46</b>
	Styling .....	46
	Shapefile symbology table .....	46
<b>Annexe A</b>	<b>Glossary.....</b>	<b>48</b>
<b>Annexe B</b>	<b>Meridian 2: (MapInfo) MID/MIF layers .....</b>	<b>56</b>
	Roads – post 1 January 2000–current; FC 3000 full specification of Roads database, tiles as 10 km by 10 km.....	56
	Administrative areas and coastline .....	57
	Developed land use area (DLUA) .....	57
	Railways.....	57
	Cartographic names.....	57
	Hydrology .....	58
	Woodlands .....	58
	Height.....	58
	Roads – prior to 1 January 2000; FC 6000 stripped Roads Database, tiles as 20 km by 20 km .....	58
	MIF file format .....	58
	Admin_In, coast_In, rail_In, DLUA, lake, river, woodland and station column definition .....	59
	Text column definition .....	59
	County and district column definitions .....	59
	A_road, b_road, minor_rd and motorway column definitions .....	59
	Gridded height* .....	59
	Settlement, junction, mndabout and roadnode column definitions.....	60
	Example .....	60

# Introduction

## Purpose of this specification and disclaimer

This is the technical specification (hereafter referred to as the specification) applicable to Meridian 2 (hereafter referred to as the product).

We may change the information in this specification at any time.

We do not accept responsibility for the content of any third party websites referenced in or accessed through this guide or through the Ordnance Survey website.

## Copyright in this specification

This guide is © Crown copyright 2014.

You may copy or distribute any part of this specification to support the use of OS OpenData, including for your personal use, use in your organisation or business, or for use with, or incorporation in, your product or application.

## Data copyright and other intellectual property rights

The Crown (or, where applicable, Ordnance Survey's suppliers) owns the intellectual property rights in the data contained in this product. You are free to use the product on the terms of the OS OpenData Licence, but must acknowledge the source of the data by including the following attribution statement: Contains Ordnance Survey data © Crown copyright and database right 2014.

# Chapter 1 Overview of Meridian 2

## Using this technical specification

Please refer to the glossary if you are unfamiliar with any of the words or terms used. The glossary can be found at [annexe A](#) (attached after the technical specification).

## Data overview

### Basic principles

Links represent roads, railways, administrative areas, coastline, DLUA, inland water and woodland area lines.

Nodes represent all intersections of links within each layer, changes in attributes in links and link ends.

Each feature has associated geometry; this may be a single coordinate pair for a single point feature for a railway station, or two or more coordinate pairs for a linear feature.

Each feature is classified by means of a feature code.

Roads, railways, railway stations, administrative area seed points, DLUA seed points, inland water and woodland area seed points have unique identifiers.

### Meridian 2 vector data structure

Meridian 2 data within each layer is supplied as vector data, in a link and node structure. Geographic features are represented as data entities, either as points or lines. Points are fixed positionally by one coordinate pair; for example, a railway station. Lines are fixed positionally by a series of connected coordinate points to represent linear map features such as roads, railways and so on. Points and lines within the data model determine the geometric (positional) characteristics of the data.

Points and lines within the data model also have associated attributes. These give the point and line entities meaning; that is, they represent the descriptive characteristic of an entity such as a feature code, a name or numerical value. Lines are also added as closing links (neat lines) along tile edges; these are required to complete the enclosure of an area. The closing link has a different feature code to the other links enclosing the area.

Throughout Meridian 2, no line feature crosses from one tile to the next, however a point feature created at the tile edge has the same coordinate value as its partner on the adjacent tile.



All features having the same feature code are recorded on the same layer. DXF has a limited link and node structure; within this structure, a feature may be a name, point, or line. Each feature is free-standing; that is, its topological relationship to any other feature is not expressed in the data.

Other important data structure concepts include **networks** and **polygons**.

**Networks** are interconnecting features structurally related by means of an explicit point described as a node. Between the nodes are series of non-intersecting line segments described as links; hence **link** and **node** – see figure 1, below. This is of special interest in GIS where there may be a need to analyse the network in order to follow routes or to close polygons.


Proprietary GIS software can be used to build and maintain networks for linear features such as roads, railways and so on, and provides the functionality to store, manage and manipulate this data.

However, caution is advised in constructing a network with the intention of using this as a de facto routing solution; Meridian 2 contains a generalised road network and will therefore not contain every road in Great Britain. Also, Meridian 2 does not contain information on drive restrictions such as one-way streets or prohibited turning, for example.

The properties of Meridian 2 make it a suitable basis for users wishing to develop applications using Meridian 2 together with their own data. As Meridian 2 is based on the National Grid, there is a simple way of overlaying users' own data provided the position is given within the National Grid.




The National Grid, as it applies to Meridian 2, is explained in [chapter 3](#) in the user guide section of this document.

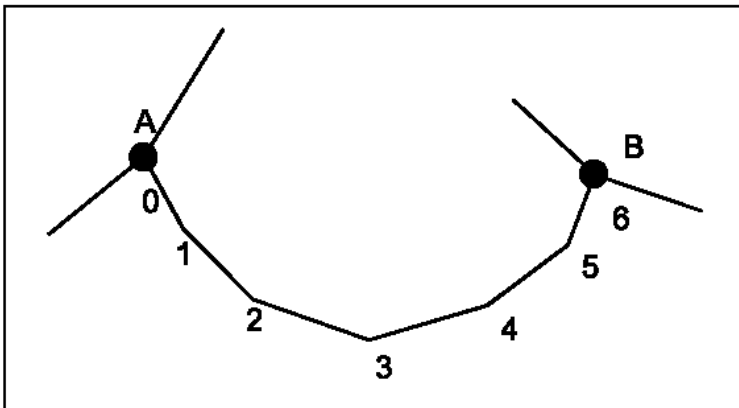

**Figure 1:** link and node

*Points A and B are nodes, as they intersect with other features. The line A–B is the link, and, in this example, is made up of six individual line segments.*

**Polygons** are continuous areas defined by sets of bounding closed lines. These are implicit within the data, but can be explicitly created with appropriate software. Stored within recognisable polygons are **seed points**, which hold information about that polygon, for example, a county name.

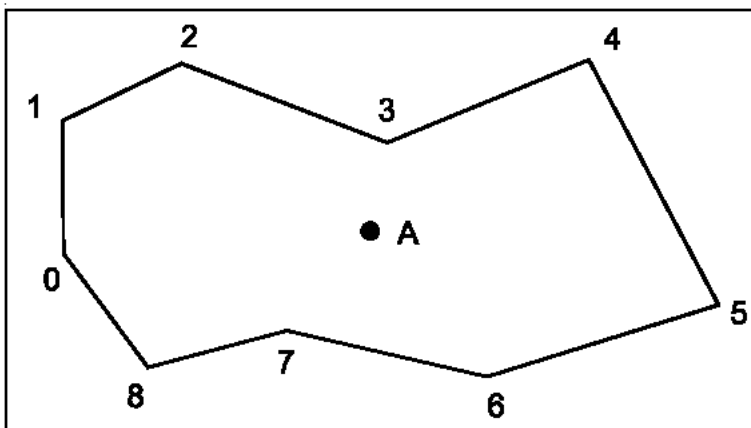

**Figure 2:** polygon

*Point A is the polygon seed point for the area: attached to this point are attributes such as the feature code, which defines the polygon and its definitive name. These attributes may be transferred to the polygon itself. The polygon in this example comprises nine individual line segments.*

There are also free-standing points, which are not associated with a defining polygon, for example, Liverpool Lime Street Station.

## Chapter 2 Meridian explained

### Features

Meridian 2 has two feature classes:

- Point features
- Line features

*In Shapefile and MID/MIF lines have been converted to polygons for specific features.*

Point features, such as administrative area seed points, and line features, such as roads, railways, and developed land use areas, are arranged into recognisable categories. A full listing of individual features is given in [chapter 3](#) of the technical specification.

Each feature has two components:

- Feature position
- Feature attributes data

Also explained in this chapter:

- Feature layer descriptions



Each feature recorded in Meridian 2 should be considered as a DXF entity. Line features are recorded as DXF line(s) or polyline(s).

Point features will be recorded in the data as INSERT BLOCKS. Certain standard symbols are defined in the BLOCKS section of the data file. A list of these standard symbols is shown in [chapter 3](#). Attributes are stored as extended entity data.

### Points and lines

Real-world geographic features are represented in the digital map data as structures of lines and points. Each point or line has a geometric and attribute component.


The geometric component defines the positional characteristic of the feature, and implicit relationships exist between points and lines based on relative position. The attribute component defines the descriptive characteristics of the feature.

Points may exist independently of lines.


A diagrammatic example of a geometric structure is shown in figure 3a.

**Figure 3a:** a geometric structure of points and lines.

Solid black, grey and broken grey lines and associated points are on different layers.

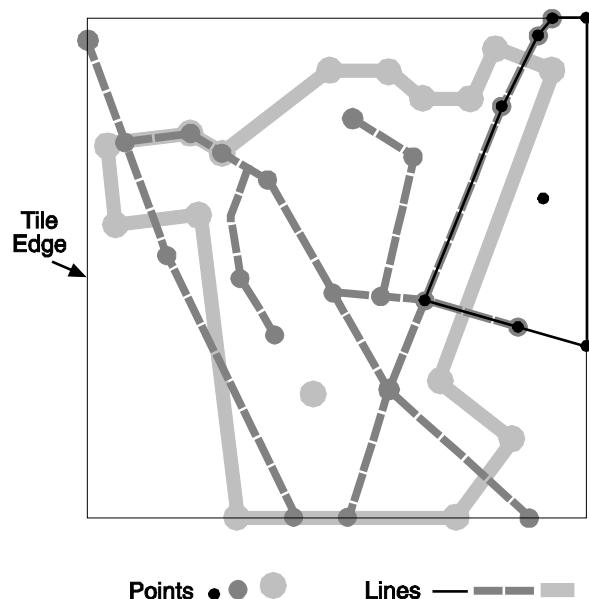

Points and lines from the geometric structure become features when an attribute, the feature code, has been added, for example, DLUA seed points are created from points, or DLUA boundaries from lines.

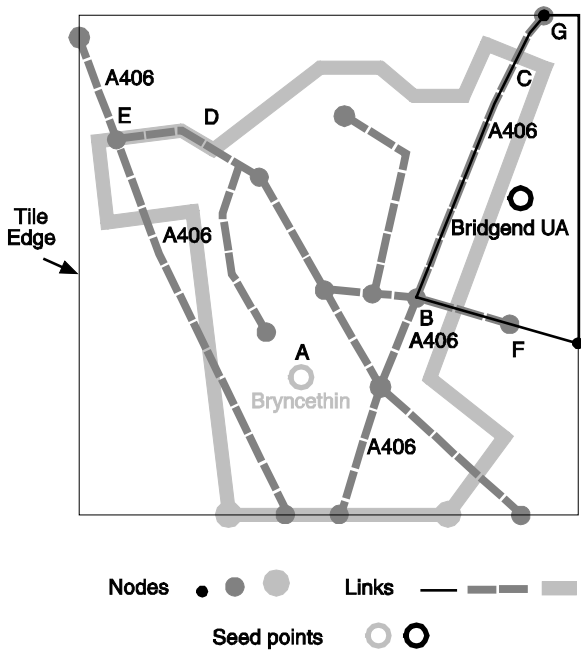

The same geometric structure as features.

Solid black, greys, and broken grey are on different layers.

In figure 3b:

Point A is a seed point with a feature code that identifies it as a DLUA; the seed point also carries its name attribute – Bryncethin.


Point B is a coordinate junction between intersecting features – in this case, where a minor road intersects with the A406. This is an example of a node.

Point C is a position where the A406 in one layer crosses the DLUA boundary in another layer. There is no node at this point.


Some points and lines are common to more than one feature, as in figure 3b. Features between D–E and G–B–F are overlapping features and are stored separately within each layer of data.

**Figure 3b:** the same geometric structure as features.

### Separate storage of overlapping features

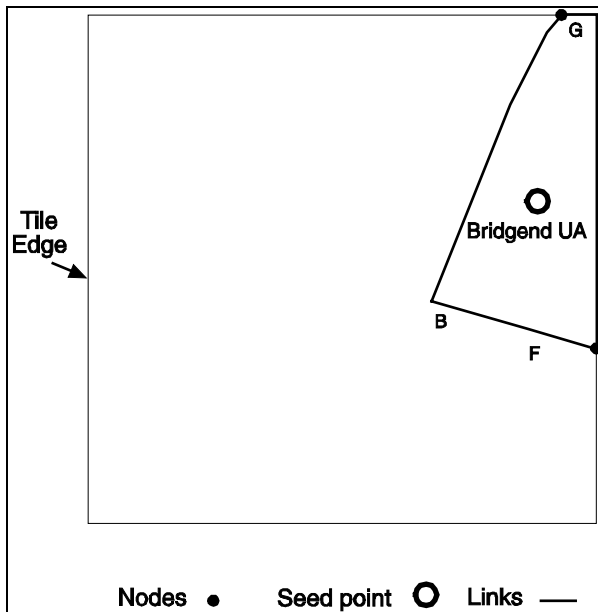

**Figure 3c:** roads

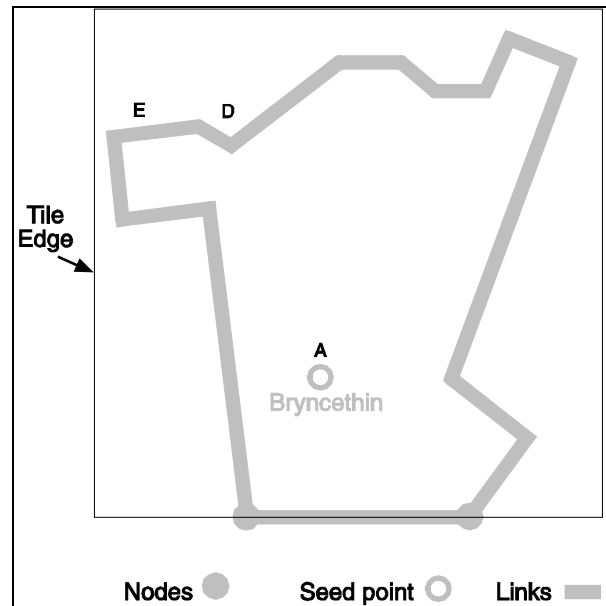

**Figure 3d:** DLUA

In figures 3c and 3d, line G–B–F is common to the A406, the minor road and administrative area boundary, the DLUA boundary; the geometry of each feature is stored separately.

## Feature position

The geometry of map features is defined in terms of coordinates. All coordinates used in Meridian 2 are based on the National Grid coordinate referencing system and are quoted to a resolution of one metre.

The National Grid, as it applies to Meridian 2, is explained more fully in [chapter 3](#) of the user guide.

## Feature attribute data

An attribute is the descriptive characteristic of a feature, that is, a non-spatial element.

The geometry of the points and lines within the data would be meaningless to the user unless they are assigned some distinguishing property. In Ordnance Survey map data terms, an attribute can be a feature code.

### Feature codes

Each feature is classified by means of a feature code (FC). A feature code is allocated when each feature is initially interpreted and captured from the map base. In this way, an A road is distinguished from a B road and other kinds of line feature by the feature code allocated to it.



Each feature is classified as belonging to a specific feature layer. These layers range in value from G8050570 to G8056801; see the AutoCAD publication *Layer Naming Convention for CAD in the Construction Industry*, version 2, based upon guidelines in BS 1192: Part 5 – *Guide for structuring of computer graphic information*. These feature layers are listed in [chapter 3](#). Attributes are stored as extended entity data.

An additional text feature code for layout of footnotes is included. This feature code is listed in [chapter 3](#).

These differences in the data are inferred during translation from Ordnance Survey's internal data format to the required customer transfer format.

### Names as attributes

The criteria for names attribute attachment are:

- Admin name (NM) is an attribute of a seed point in its administrative area, for example, 'Hampshire County'.
- Proper name (PN) is an attribute of a seed point in a DLUA; for example, 'Bexhill', or a node point for a railway station; for example, 'Great Ayton Station'.
- Text (TX) is a text string transferred in an attribute record to be displayed as stand-alone cartographic text; for example, 'Southampton' – a place name.
- Hydrology (WA) is an attribute of a seed point in a water area.
- Woodlands (FA) are an attribute of a seed point in a woodland area.

### Road number (RN) attribute

This attribute defines the DfT road classification number – for example, 'M40' – that relates to a link. If a road is not classified, then this attribute will not be present.

### Trunk road (TR) attribute

This attribute defines whether the link forms part of a trunk road. If it is, then the link will have a trunk road attribute with a value of Y; if it is not a trunk road then there will be no value in this field.

### Line length (LL) attribute

This attribute defines the length of the link in metres and will be present for all link records. It is calculated from the planimetric coordinates making up the link and does not take into account the effect of slope.

### OSODR attribute

This attribute defines the Ordnance Survey Roads database reference (OSODR). This will uniquely identify any link or node within the national Roads dataset. The OSODR will be used as the unique identifier for each link and node.

A road object is part of a road between nodes (junctions) uninterrupted by tile or map edges.

An OSODR refers not just to a single link but may refer to many links that make up a road object – which may be chained together across tile edges. Thus, on adjoining tiles, there may be two or more links with the same OSODRs. This attribute applies to links and nodes. It will be present for all features.

An OSODR has been assigned to all existing features (links and nodes) in the Roads database. Any features that are new to Roads after the initial allocation will be assigned an OSODR when they are loaded to the database.

The OSODR for a feature will never be modified – only created and deleted. However, there may be many changes to a feature with a specific OSODR during the lifetime of that OSODR allocation. There are two reasons for changes. These are:

- 1 The coordinates of the feature may move within a specified tolerance – currently 3 metres either side of a link, 10% of its length, and 5 metres' movement of any node.
- 2 The attributes associated with a feature may change. Any changes to these attributes will not affect the OSODR allocated to that feature.

The following attributes may change for link features:

- feature code;
- length of link;
- road name;
- road number; and
- trunk road indicator.

The following attributes may change for node features:

- direction of links at node;
- feature code;
- junction name;
- number of links at node;
- level of link at node; and
- settlement name.

If a feature is deleted from the Roads database, then the OSODR allocated to that feature will cease to exist.

## Link level at node

The level field in Node Record 16 indicates – for roads – the relative height relationship between intersecting links at a node. It does not relate to ground surface level. If a road over a bridge can be accessed then a level value of 0 is used; a value of 1 is used when there is no access from one road to the other at an intersection. See figure 4.

In this instance, the single node will show a level 0 for all links in Node Record 16 as it is possible to access any carriageway from any approach road.

A bridge over a road that cannot be accessed will show a level value of 1.

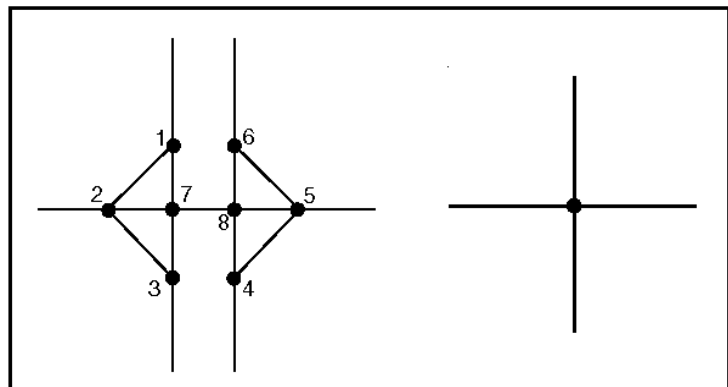


Figure 4: grade separation

## Proper name (PN) attribute

This attribute defines the road name associated with any link in the Roads database. If a link does not have a proper name then the attribute will not be present. Where the road is otherwise not named and part of a named estate, the estate name will be allocated to the road.

## Roundabout (RT) attribute

This attribute defines whether a node is a generalised representation of a roundabout in the Meridian 2 road data. If it is, then the node will have a roundabout attribute with a value of 'Y'.

## Junction name (JN) attribute

This attribute indicates the junction number of motorway junctions and the other classified roads at that junction. The junction name is variable length text, and is in the format M6J10A, where M6 is the DfT road number, and J10A indicates that this is the junction numbered 10A of the M6. If the junction has no junction number, then that part of the junction name is not supplied.

There could be any number of roads at a junction; therefore, each classified road at that junction may be repeated in the junction name attribute. An oblique character (/) separates each road number and junction. The following is an example of a junction name attribute:

M40J1/A40/A413/A4020

This attribute only applies to nodes. If the node does not have a junction name then this attribute is not present.

## Settlement name (SN) attribute

This attribute defines the name of a location or settlement. This name is attached to a node that is close to the centre of the extent of the location or settlement. Where a settlement has only private roads (not shown in Meridian 2) running through it, a road node is used on the nearest minor or classified road.

## Unique identifiers

Unique identifiers are used to uniquely identify some features within Meridian 2. These are:

- OSODR attribute defines the Ordnance Survey Roads database reference (OSODR). This will uniquely identify any link or node within the national Roads dataset. Links are not merged at tile edges.
- Railway and railway station identifiers. These uniquely identify any railway link or railway station within the national Meridian 2 database between junctions and/or stations.
- Developed land use area identifier. This uniquely identifies any DLUA polygons within the national Meridian 2 database.
- Global identifier. This uniquely identifies any administrative area seed point and will not change between tiles. Each administrative seed within a county or district polygon holds the same unique ID.
- Forestry identifier. This identifies any forestry area seed point.
- Hydrology identifier. This identifies any hydrology area seed point.

The unique identifiers are unique references and will be maintained, except where there has been significant change to a feature.

The unique identifier may refer to several links representing a linear object across tiles; for example, a road or a railway, which may be chained together across tile edges. Thus, on adjoining tiles, there may be two or more links with the same unique identifier. Figure 5 illustrates this principle; the LINE\_IDs are different but they all share the same OSODR across tile edges.

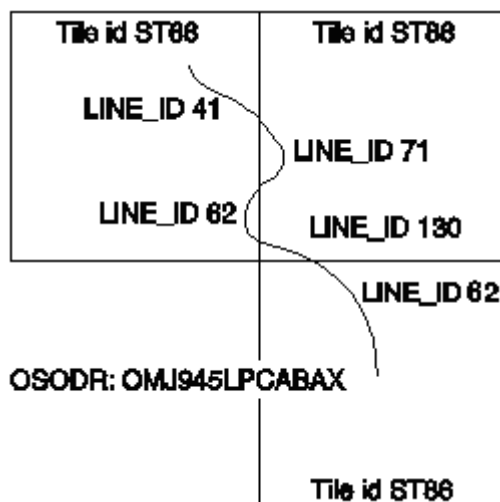


Figure 5: unique identifiers

Unique identifiers have been assigned to all existing roads (links and nodes), railway links and railway stations and to seed points for administrative areas, DLUAs, hydrology (inland water) and woodlands. Any of these features that are new to Meridian 2 after the initial allocation will be assigned an appropriate unique identifier when the database is refreshed.

The unique identifier for a feature will never be modified – only created and/or deleted. If a feature is deleted from the Meridian 2 database, then the unique identifier allocated to that feature will cease to exist.

## Feature layer descriptions

The feature codes that appear in Meridian 2 within each layer are detailed in [chapter 4](#) of the technical specification. The individual layers are described below.

*NOTE: names or numbers appear in all layers as attributes. The roads layer is the first hierarchical layer; the other layers will be manipulated to fit in the following 1–8 hierarchical order.*

### 1 Roads

Motorways, major and minor roads are represented in the data. Complex junctions are collapsed to single nodes and multi-carriageways to single links.

To avoid congestion, some minor roads and cul-de-sacs less than 200 metres are not represented in the minor road feature description of the data unless the minor road terminates in a roundabout or where their removal would leave an isolated DLUA. Private roads and tracks are not included.

Hierarchical position 1

### 2 Railways

All railway stations open to passengers and all standard gauge passenger rail tracks are represented.

A railway intersection consists of links and a node. Where railways cross, the rail ID is maintained and no node is added to break the network. A tunnelled railway line (feature code 6142) is only added where a tunnel has been distinguished using other Ordnance Survey products such as OS MasterMap® Topography Layer and/or aerial photography. Links and nodes carry a feature code.


The railway station points will carry the station name.

To maintain positional relationship, features in this layer will be adjusted and fitted to the roads.

Hierarchical position 2

### 3 Administrative areas and coastline

Administrative areas include information for unitary authority areas for Scotland, Wales, county, district and London borough boundaries for England.

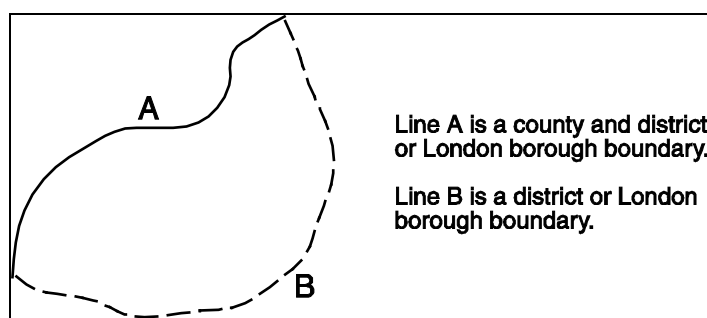

**Figure 6:** hierarchical relationship of boundaries for England

Each link for an administrative area carries a feature code and the administrative level associated with the left and right sides of that link. This also applies to coastline, but only to the landside of the coastline, that is, no administrative area information is added to the seaward side.

Each administrative area contains a seed point that identifies the enclosed area and carries a feature code and the associated administrative area name. Separate areas of the same administrative unit carry seed points with different identifiers.

Offshore islands carry a county and district or unitary authority seed point. There is no logical connection in the data between them and administrative units other than the same name attribute.

There is no explicit information to identify which links form the bounds of a particular area. The left and right county and district pointers on links do not contain the name of the administrative area, but refer to the seed point that has the administrative area name as its attribute.

The coastline follows the mean high water (MHW) up all estuaries to the normal tidal limit (NTL). Administrative areas are only shown down to MHW.

The administrative areas are adjusted to the coastline.

To maintain positional relationship, features in this layer may be adjusted and fitted to roads and railways.

Hierarchical position 3

#### 4 Developed land use areas

Developed land use area (DLUAs) features represent the polygons around cities, towns, villages and industrial, commercial and business parks as contained within the Strategi dataset. Urban areas equal to or greater than 0.01 sq km are captured.

Link features enclose DLUA features. Such areas contain a seed point that identifies the enclosed area and carry a feature code and the associated DLUA name. **There is no explicit information to identify which link forms the bounds of a particular area.**


The whole DLUA has been positioned to the road pattern by best-fit practice.

Hierarchical position 4


#### 5 Cartographic names

Place names from the small-scale database and railway station attribute names are shown as independent text features and located near the feature that they describe.

Place names are collapsed from double-banked, treble-banked or composite text to a single text feature with all the text as one string.

	The text font and text height in metres have been used for these cartographic names and are – as layers – separate from the feature with which they are associated.
---	---

The Ordnance Survey convention for the digitising of names is as follows: all names are digitised as point features, given as X and Y National Grid coordinates. The point has been digitised relative to the map feature it describes, and the actual point represents one of the standard positions shown in figure 7.

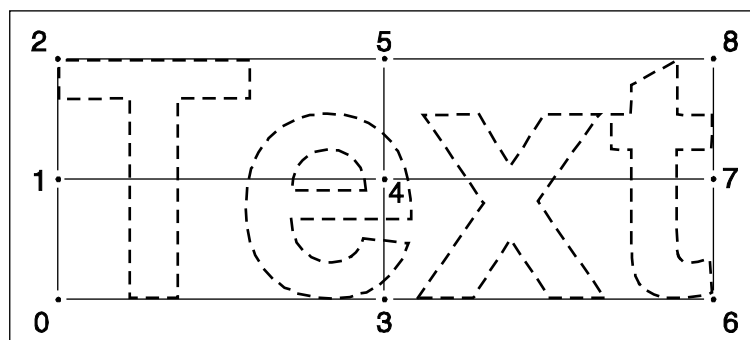

**Figure 7:** standard Ordnance Survey text positions

Names are normally placed on the printed map parallel to the horizontal grid.

Text in Shapefile and MID/MIF formats is positioned at a converted position 0 as the true text position is not supplied.





Position 0 is supplied.

Hierarchical position 5


## 6 Hydrology

Each water area contains a seed point identifier that carries a feature code and the associated attribute. Each link for water boundaries carries a feature code.

To maintain positional relationships, features in this layer may be adjusted and fitted to the hierarchy. See the [note](#) at the beginning of feature layer descriptions earlier in this chapter.

Dark links have been used to maintain the connectivity of the network across lakes and reservoirs. Where links entering and leaving the lake or reservoir carry the same name, the dark link is attributed with this name.

Hierarchical position 6

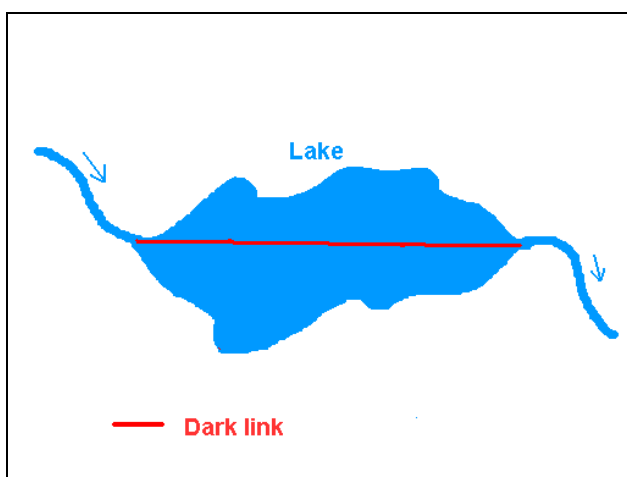

**Figure 8:** dark link diagram showing connectivity

A river flows into a lake. The amalgamation of this is a dark link running through the middle of the lake and outputting as a river again.

## 7 Woodlands

Each link for woodland boundaries carries a feature code. Each woodland area contains a seed point identifier, which carries a feature code and the associated attribute. To maintain positional relationship, features in this layer may be adjusted and fitted to hierarchy.

Hierarchical position 7

## 8 Gridded height

Height information is produced in the form of digital terrain model (DTM)-style data.

Gridded height information is averaged from the 50 m resolution Land-Form PANORAMA dataset to a resolution of 200 m and rounded down to the nearest 1 m value.

*NOTE: gridded height is supplied with Meridian 2 on a separate CD.*

## Chapter 3 DXF explained

The purpose of this chapter and [chapter 4](#) is to:

- Provide a brief description of the presentation of Meridian 2 in the DXF transfer format.
- Data Exchange Format (DXF (conforming to AutoCAD release 12 with extended entity data)). As part of this description, data structure diagrams are used to give greater explanation where necessary.
- Provide Licensed Partners with as much detail as necessary to enable Meridian 2 files in DXF to be easily understood and processed by application software.


The term data structure used in these chapters refers to the organisation and sequence of the records in the data file and not to the geographical topology of the data.

These chapters should be read in conjunction with [chapter 1](#) and [chapter 2](#), which describe the content of Meridian 2.

### An overview of Meridian 2 in DXF

#### DXF

Meridian 2 is available in DXF, conforming to AutoCAD release 12, using extended entity data to store attributes. The transfer format is that defined by the NEDO working party for the exchange of two-dimensional drawings in the construction industry. An overview of the data structure of a Meridian 2 file in DXF is shown below.

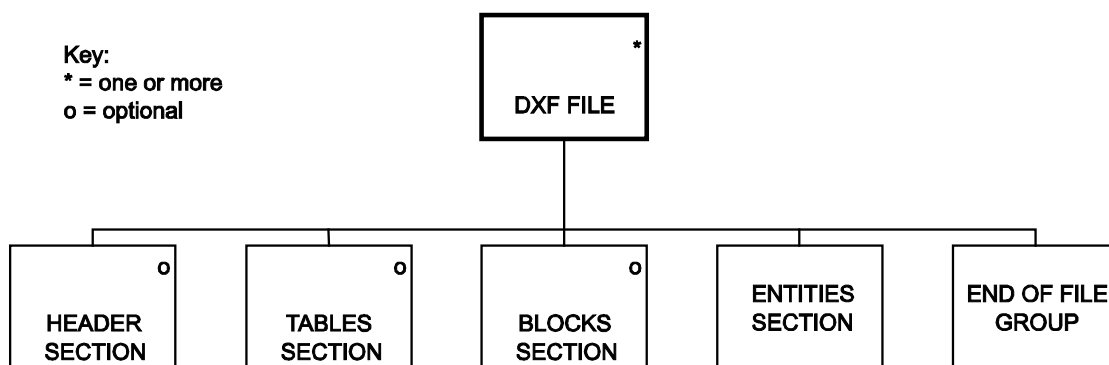

### Structure of Meridian 2 in DXF

Meridian 2 has a limited link-and-node data structure; within this structure a feature may be a name, a point, or a line (or series of lines forming a coherent unit). Each feature is free-standing; that is, its topological relationship to any other feature is not expressed in the data.

Features are classified by type and each type is placed in a separate DXF layer.

#### Line features

A feature is a subjective entity; that is, so long as the constituent lines are of the same description (layer), a feature need not fully describe a logical piece of detail.

The extent of a feature is determined by digitising conventions and does not always coincide with the topology. Each linear feature is composed of a string of XY coordinate pairs implicitly joined by straight lines.

The colour and line weights of some layers may differ when DXF is used with certain software packages.

#### Area features

Area features are not defined within vector link and node data. Features that might be thought of as area features are treated in the data as linear features, for example, a DLUA boundary is treated as a polyline in layer G8056300.

## Name features

Name features are treated as free-standing text data. There is no explicit relationship (in the data) between a text feature and the point or line feature to which it belongs.

Ordnance Survey distinguishes between layer name types – for example, place names and station names – by placing each name type in a separate DXF layer.

Text has position, expressed as a single coordinate pair held as X and Y offsets from the map origin (south west corner). Text that is double or treble banked is treated as two or three separate features. The text string may be considered to be contained within an envelope whose bottom left-hand corner is positioned on this coordinate pair. Text is oriented; that is, it may run from west to east across the map, or it may be plotted at some other angle measured anticlockwise from grid east.

## Drawing content and format

### Coordinate system

The coordinate system is National Grid (NG).

The National Grid coordinates are to a resolution of 0.01 m. This is the resolution of the source data.

### Height

No height attributes are applied to any feature.

See chapter 2 of the technical specification, [8 Gridded Height](#).

### Layer names

See the AutoCAD publication *Layer Naming Convention for CAD in the Construction Industry*, version 2, which is based upon the guidelines laid down in *BS 1192: Part 5 – Guide for structuring of computer graphic information*.

Each layer name is an eight-character string. The first four characters relate to the AUG/Autodesk system, with G (GIS) as the source of the information, and 800–899 as the part code. This product is G805.

The remaining four digits relate to existing Ordnance Survey digital map data and are leading zero-filled.

For example:

G8053000 – Motorways

### Neatline

Neatlines around the extent of the map data are added as lines in the ENTITIES section (layer name G8050572).

### Grid

A grid is added as lines in the ENTITIES section (layer name G8050572). The grid is created by the translator and, therefore, must be specified before the translation takes place.

### Grid values

Full 100 000 metre National Grid easting and northing values followed by an *m* are added as text strings in the ENTITIES section (layer name G8050573) at each corner of the map extent, either horizontal or vertical, to read from the lower left corner of the tile.

Intermediate grid values are shown as multiples of 1 000 metres from the nearest 100 km National Grid (layer name G8050572). These are horizontal.

## Meridian 2 DXF layers


Layer name	Feature name	Line type	Line	Entity	Colour	Block
G8053000	Motorway	CONTINUOUS	3	POLYLINE	BLUE	
G8053001	A road	CONTINUOUS	1	POLYLINE	RED	
G8053002	B road	CONTINUOUS	1	POLYLINE	ORANGE	
G8053004	Minor road	CONTINUOUS	1	POLYLINE	WHITE	
G8053500	Road node	DOT		INSERT	GREEN	CIRCLE (small)
G8053501	Road edge node	DOT		INSERT	GREEN	CIRCLE (small)
G8056140	Railways	CONTINUOUS	3	POLYLINE	WHITE	
G8056142	Tunnelled railway	DASHED	1	POLYLINE	WHITE	
G8056155	Station	DOT		INSERT	RED	CIRCLE
G8056730	Railway node	DOT		INSERT	GREEN	CIRCLE (small)
G8056731	Railway edge node	DOT		INSERT	GREEN	CIRCLE (small)
G8056401	County boundary	DASHDOT	1	POLYLINE	GREEN	
G8056403	District boundary/London borough/unitary authority	DASHED	1	POLYLINE	GREEN	
G8056405	County/district/London borough/unitary authority boundary	DASHDOT	1	POLYLINE	GREEN	
G8056800	Boundary neat line	CONTINUOUS	1	POLYLINE	GREEN	
G8056411	County seed	CONTINUOUS		INSERT	GREEN	SEEDPOINT
G8056415	District seed	CONTINUOUS		INSERT	GREEN	SEEDPOINT
G8056710	Boundary node	DOT		INSERT	GREEN	CIRCLE
G8056711	Boundary edge node	DOT		INSERT	GREEN	CIRCLE
G8056200	Coastline	CONTINUOUS	1	POLYLINE	BLUE	
G8056740	Coastline node	DOT		INSERT	GREEN	CIRCLE
G8056741	Coastline edge node	DOT		INSERT	GREEN	CIRCLE
G8056300	DLUA boundary	CONTINUOUS	2	POLYLINE	GREY	
G8056310	DLUA seed	CONTINUOUS		INSERT	GREY	DLUASEED
G8056720	DLUA node	DOT		INSERT	GREEN	CIRCLE
G8056721	DLUA edge node	DOT		INSERT	GREEN	CIRCLE
G8056801	DLUA neat line	CONTINUOUS	1	POLYLINE	GREY	
G8056500	Place name	CONTINUOUS		TEXT	WHITE	
G8056551	Station name	CONTINUOUS		TEXT	WHITE	
G8050575	Default	CONTINUOUS	1	POLYLINE	WHITE	
G8050571	Footnotes	CONTINUOUS		INSERT	WHITE	ME_FOOTNOTES
G8050572	Grid lines and values	CONTINUOUS	1	LINE/TEXT	WHITE	
G8050573	Grid values	CONTINUOUS		TEXT	WHITE	
G8056223	River – small	CONTINUOUS	1	POLYLINE	YELLOW	
G8056224	River – medium	CONTINUOUS	2	POLYLINE	YELLOW	
G8056225	River – large	CONTINUOUS	3	POLYLINE	GREEN	
G8056230	River – hidden	DASHED	1	POLYLINE	GREEN	
G8056231	Aqueduct	CONTINUOUS	1	POLYLINE	GREEN	

Layer name	Feature name	Line type	Line	Entity	Colour	Block
G8056232	Dark link	CONTINUOUS	1	POLYLINE	BLUE	
G8056243	Canal	CONTINUOUS	1	POLYLINE	YELLOW	
G8056255	Area water (lake)	CONTINUOUS	2	POLYLINE	GREEN	
G8056292	Area water (seed)	CONTINUOUS		INSERT	BLUE	SEEDPOINT
G8056552	Water text	CONTINUOUS		TEXT	RED	
G8056770	Water feature (node)	DOT		INSERT	BLUE	CIRCLE
G8056771	Area water (node)	DOT		INSERT	BLUE	CIRCLE
G8056772	Area water (edge node)	DOT		INSERT	BLUE	CIRCLE
G8056773	Water feature (edge node)	DOT		INSERT	BLUE	CIRCLE
G8056803	Area water (neat line)	CONTINUOUS	2	POLYLINE	YELLOW	
G8056664	Woodland boundary	CONTINUOUS	2	POLYLINE	CYAN	
G8056750	Woodland boundary node	DOT		INSERT	BLUE	CIRCLE
G8056663	Woodland seed	CONTINUOUS		INSERT	WHITE	SEEDPOINT
G8056751	Woodland (tile edge) node	DOT		INSERT	WHITE	CIRCLE
G8056802	Woodland (tile edge) polygon	CONTINUOUS	1	POLYLINE	CYAN	
G8056762	Gridded height	DOT		INSERT	MAGENTA	

## DXF footnotes

The following footnotes are added as an insert BLOCK in the ENTITIES section of the DXF data file. The positions of the footnotes are indicated in figure 9.

NOTE 1:	Top margin centrally aligned, 1 750 ground metres, Layer: G8050571 Ordnance Survey®
NOTE 2:	Top margin centrally aligned, 1 500 ground metres, Layer: G8050571 Meridian 2 data
NOTE 3:	Lower left margin, 500 ground metres, Layer: G8050571 Translation date dd Mmmmmmmmm CCYY
NOTE 4:	Lower left margin, 500 ground metres, Layer: G8050571 Tile reference number __ _ _
NOTE 5:	Lower left margin, 500 ground metres, Layer: G8050571 Reproduced from Ordnance Survey Meridian™ 2 data with the permission of The Controller of Her Majesty's Stationery Office. © Crown Copyright CCYY
NOTE 6:	Lower right margin, 500 ground metres, Layer: G8050571 The derived scale of the product is dependent upon the source data.
NOTE 7:	Lower right margin, 500 ground metres, Layer: G8050571 The representation of a road, track or path is no evidence of a right of way. The alignment of tunnels is approximate.
NOTE 8:	Lower right margin, 500 ground metres, Layer: G8050571 Date of last amendment dd Mmmmmmmmm CCYY
NOTE 9:	Lower right margin, 500 ground metres, Layer:G8050571 Product specification. 'Meridian_02.04'

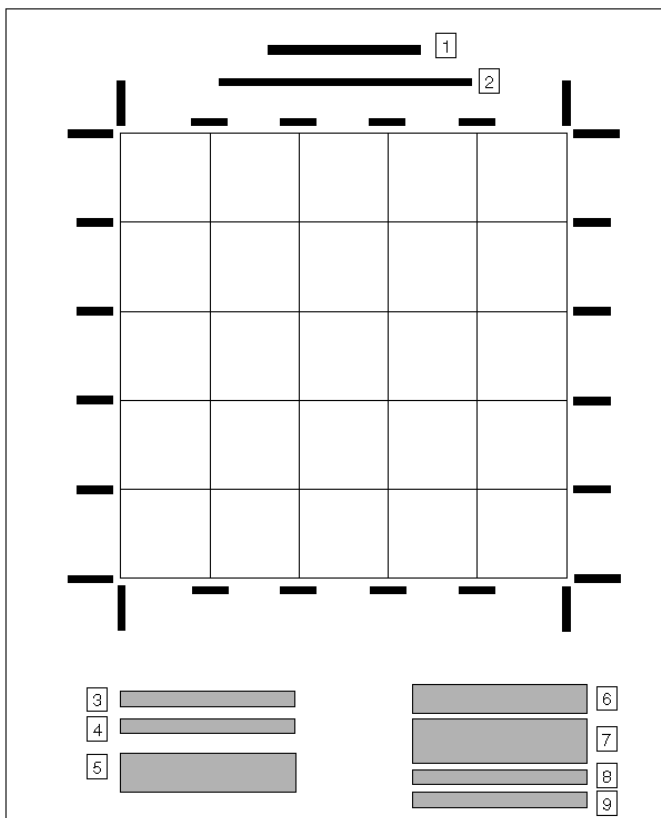

**Figure 9:** layout of footnotes

# Chapter 4 DXF file structure for Meridian 2

## General

The following paragraphs describe the DXF group and section structure for the transfer of Meridian 2. It is assumed that the reader of this chapter is familiar with the AutoCAD, release 12, reference manual, which is published by:

Autodesk Ltd  
1 Meadow Gate Avenue  
Farnborough Business Park  
FARNBOROUGH  
GU14 6FG.

Website: [www.autodesk.co.uk](http://www.autodesk.co.uk)

or an equivalent document published by the reader's software supplier if a CAD package other than AutoCAD is to be used.

Meridian 2 DXF files containing Ordnance Survey data can be very large and so are supplied on CD-ROM media only.

This chapter gives a detailed breakdown of the data structure of Meridian 2 in DXF. This is a two-stage procedure that consists of:

- a diagrammatic view of the data structure with a preceding outline description of that part of the data structure; and
- detailed examples of the record sequence and contents of the data structure. A diagram of the record group precedes each example.

## Data structure

The following diagrams (figures 10a–10b) represent the data structure of DXF. Where one element of a figure is the starting point for another figure, this is indicated beneath the relevant box.

For details of the specification for the DXF group, see the AutoCAD, Release 12, reference manual.


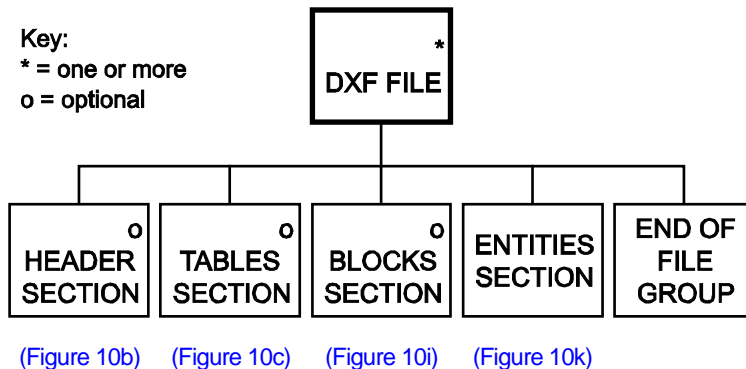


Figure 10a: Level 1

## Header

The header will be constructed as follows, with only those fields being supplied.

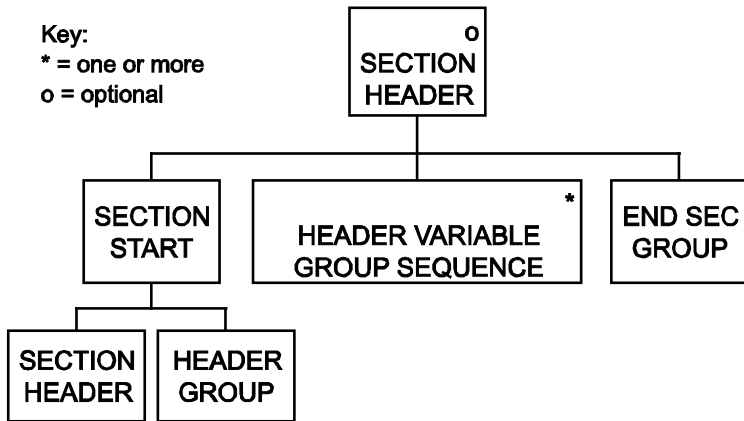

**Figure 10b:** Level 2

The header must be structured in the following order.

0		
SECTION		
2		
HEADER		
9	\$ACADVER	AutoCAD drawing database version number
1	AC1009	This indicates Release 11 or 12 (not 9)
9	\$EXTMIN	X and Y drawing extents lower left corner
10	nnnnnnn . nn	Minimum eastings, (National Grid coordinates)
20	nnnnnnn . nn	Minimum northings, (National Grid coordinates)
9	\$EXTMAX	X and Y drawing extents, upper right corner
10	nnnnnnn . nn	Maximum eastings, (National Grid coordinates)
20	nnnnnnn . nn	Maximum northings, (National Grid coordinates)
9	\$LIMMIN	X and Y drawing limits, lower left corner
10	nnnnnn . n	X drawing limit, lower left corner, (in the AutoCAD World Coordinate System (WCS))
20	nnnnnn . n	Y drawing limit, lower left corner, (in WCS)
9	\$LIMMAX	X and Y drawing limits, upper right corner
10		




nnnnnn . n 20	X drawing limit, upper right corner, (in WCS)
nnnnnn . n 9	Y drawing limit, upper right corner, (in WCS)
\$LTSSCALE 40 100.0 9	Global linetype scale
\$ATTMODE 70 1 9	Attribute visibility  This sets attributes to on when the file is open
\$TEXTSIZE 40 1.0 9	Default text height
\$TEXTSTYLE 7	Current text style name
STANDARD 9	
\$CELTYPE 6	Entity linetype name
BYLAYER 9	
\$CECOLOR 62 256 9	Entity colour name  Indicates colour ID BY LAYER
\$LUNITS 70 2 9	Units format for coordinates and distances
\$LUPREC 70 1 9	Units precision for coordinates and distances
\$AUPREC 70 1 9	Units precision for angles
\$ANGBASE 50 0.0 9	Angle zero direction

\$ANGDIR            Angle rotation  
 70  
 0                    1 = clockwise angles, 0 = anti-clockwise angles  
 9  
 \$PDMODE           Point display mode  
 70  
 1  
 9  
 \$PDSIZE            Point display size  
 40  
 0.0  
 9  
 \$PLINEGEN         Sets the linetype pattern generation around the vertices of a two-dimensional polyline  
 70  
 1  
 0  
 ENDSEC            End of section

## Tables

Key:  
 o = optional

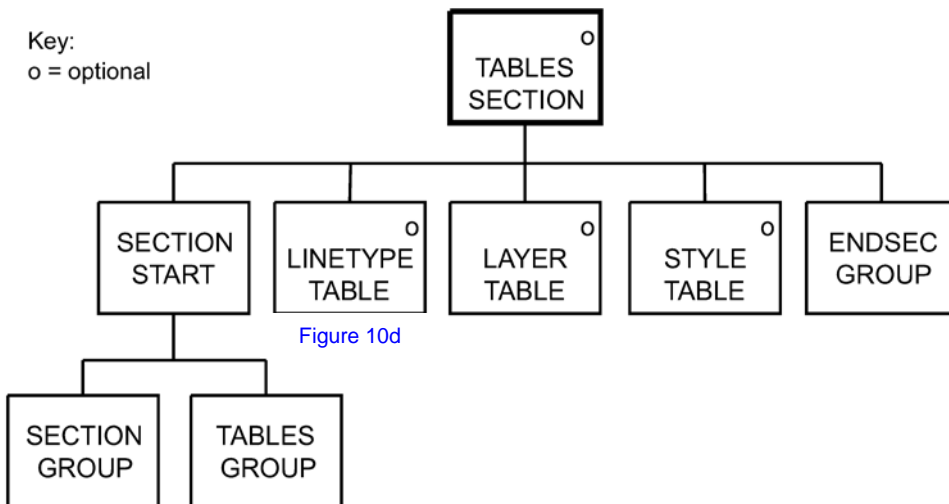

**Figure 10c:** Level 2

The Tables Section will follow the Header Section and will contain three tables:

- Linetype Table.
- Layer Table.
- Style Table.

Key:

\* = one or more

o = optional

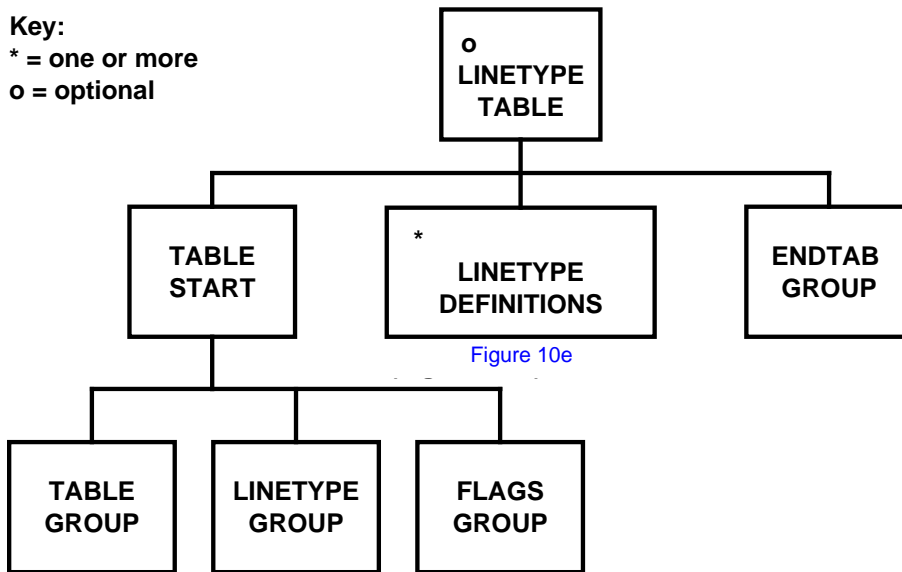


Figure 10d: Linetype Table Level 3

The Linetype Table will contain definitions for the following line types:

- solid line (CONTINUOUS)
- dashed line (DASHED)
- dashdot line (DASHDOT)
- dotted line (DOT)

Key:

\* = one or more

o = optional

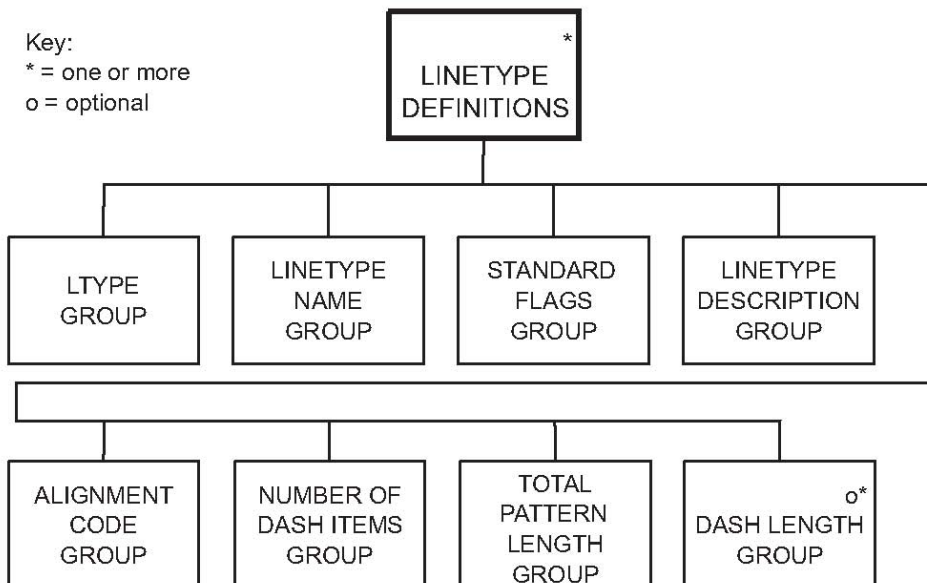


Figure 10e: Level 4

Thus:

0  
TABLE  
2  
LTYPE  
70  
5  
0

LTYPE  
2  
CONTINUOUS  
70  
64  
3

Solid Line  
72  
65  
73  
0  
40  
0.0  
0

LTYPE  
2  
DASHED  
70  
64  
3

-----  
72  
65  
73  
2  
40  
0.75  
49  
0.5  
49  
-0.25  
0

LTYPE  
2  
DASHDOT  
70  
0  
3

-.-.-.-.-  
72  
65  
73  
4  
40  
1.0  
49  
0.5  
49  
-0.25  
49  
0.0  
49  
-0.25  
0

LTYPE  
2  
DOT  
70  
64  
3

.....  
72  
65  
73

2  
 40  
 0.25  
 49  
 0.0  
 49  
 -0.25

0  
 ENDTAB

Key:  
 \* = one or more  
 o = optional

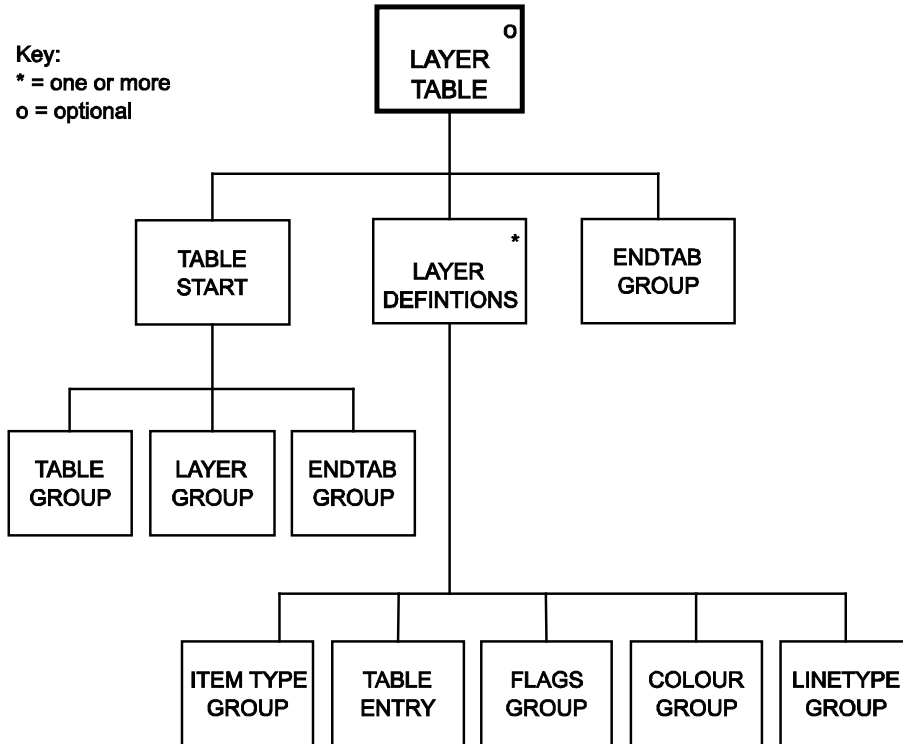


Figure 10f: Level 3

Details of the Layer Table can be seen in [Meridian 2 DXF layers](#) in [chapter 3](#).

Key:  
 \* = one or more  
 o = optional

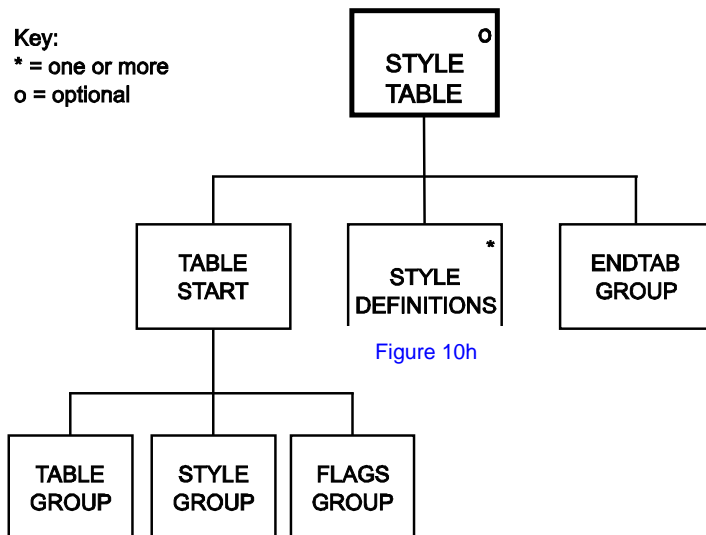


Figure 10g: Style Table Level 3

The Style Table will contain the text file load instructions for:

- SIMPLEX.SHX
- MONOTEXT.SHX

Key:  
\* = one or more

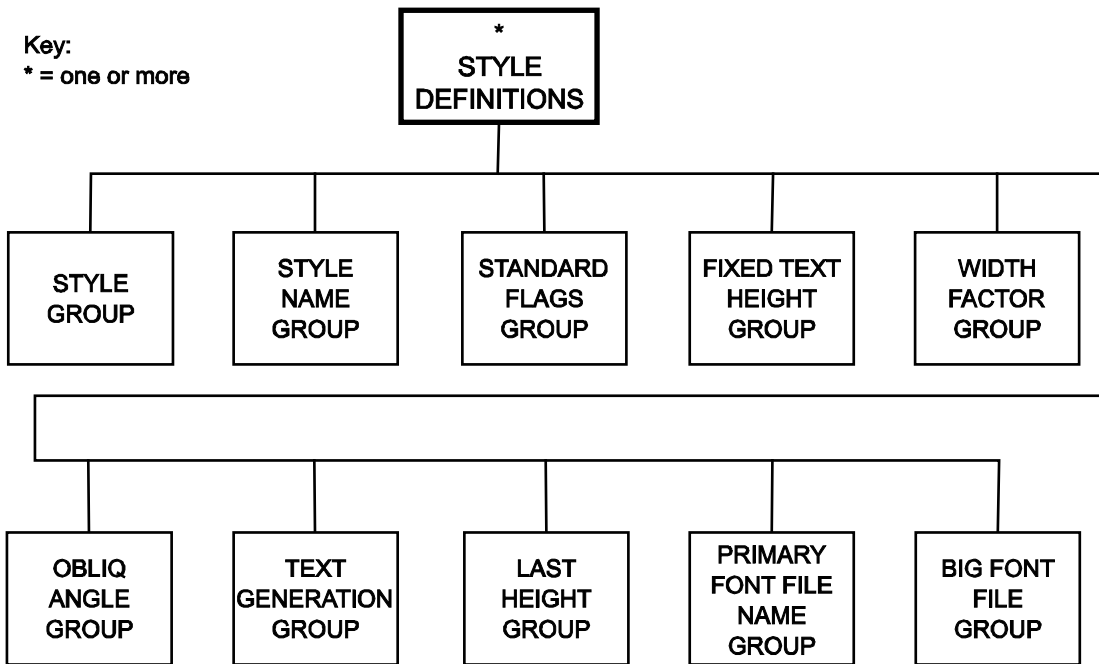


Figure 10h: Level 4

## Blocks

Key:  
\* = one or more  
o = optional

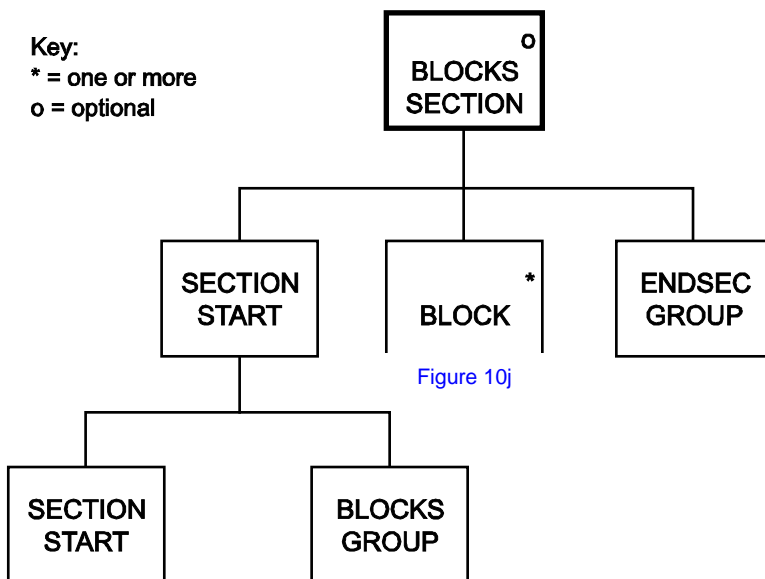


Figure 10i: Level 2

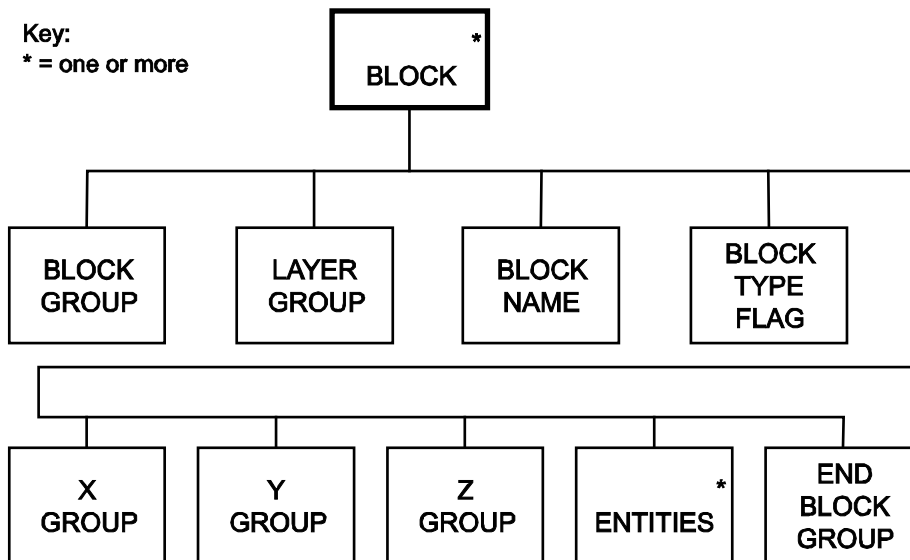


Figure 10j: Level 3

## Entities section

The Entities Section will contain DXF entities for:

- Ordnance Survey map footnotes data (INSERT entities);
- Grid and neatline (TEXT and LINE entities); and
- Ordnance Survey features (TEXT, POLYLINE and INSERT entities).

Extended entity data will be used to store attributes.

The structure of each different entity is as follows:

a – INSERT entities – these consist of:

- INSERT entity type group (Attribute number 0)
- Layer name group (8)
- Block name group (2)
- X coordinate group (10)
- Y coordinate group (20)
- X scale factor (41) [optional]
- Y scale factor (42) [optional]
- Orientation group (50) [optional if 0]

b – LINE entities – these consist of:

- LINE entity type group (0)
- Layer name group (8)
- Start X coordinate group (10)
- Start Y coordinate group (20)
- End X coordinate group (11)
- End Y coordinate group (21)

c – POLYLINE entities – these consist of:

- POLYLINE entity type group (0)
- Layer name group (8)
- Vertices follow flag group (66)
- Polyline flags group (70) [optional]
- A number of VERTEX entities [shown below]
- SEQEND group (0)

d – VERTEX entities – these consist of:

- VERTEX entity type group (0)
- Layer name group (8)
- X coordinate group (10)
- Y coordinate group (20)
- Z coordinate group (30)

e – TEXT entities – these consist of:

- TEXT entity type group (0)
- Layer name group (8)
- X coordinate group (10)
- Y coordinate group (20)
- Text height group (40)
- Text string group (1)
- Justify type group (72) [optional if 0]
- Justify type group (73) [optional if 0]
- Orientation group (50) [optional if 0]
- Text style group (7) [optional]
- Align X group (11) [only present if Justify type group is present and has a value of 2]
- Align Y group (21) [only present if Justify type group is present and has a value of 2]

f – EXTENDED entities – these consist of:

- Application name (1001)
- Control string (1002)
- String (1000) [one or more]
- Control string (1002)



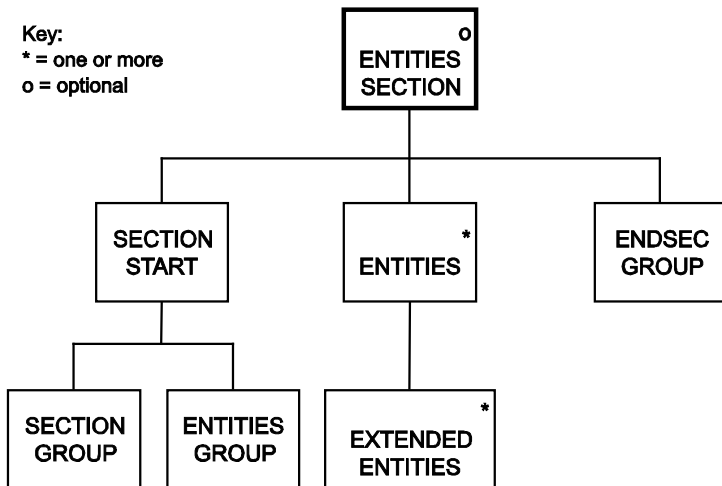


Figure 10k: Level 2

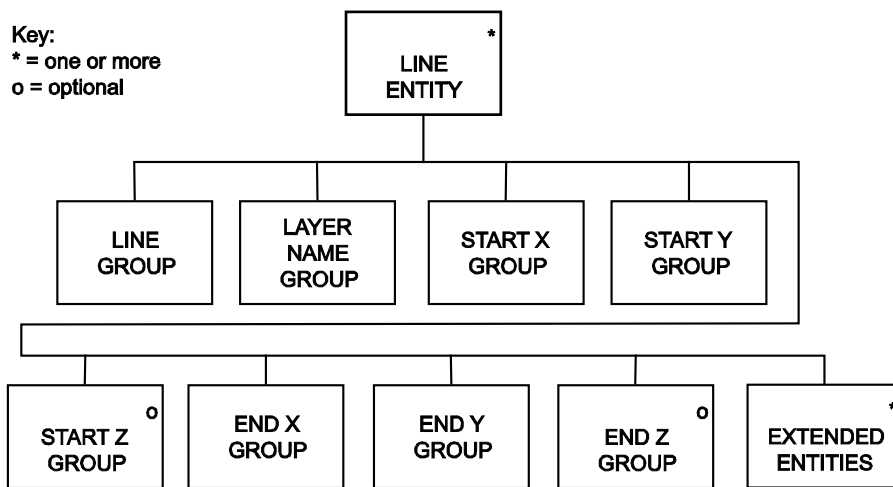


Figure 10l: Level 3

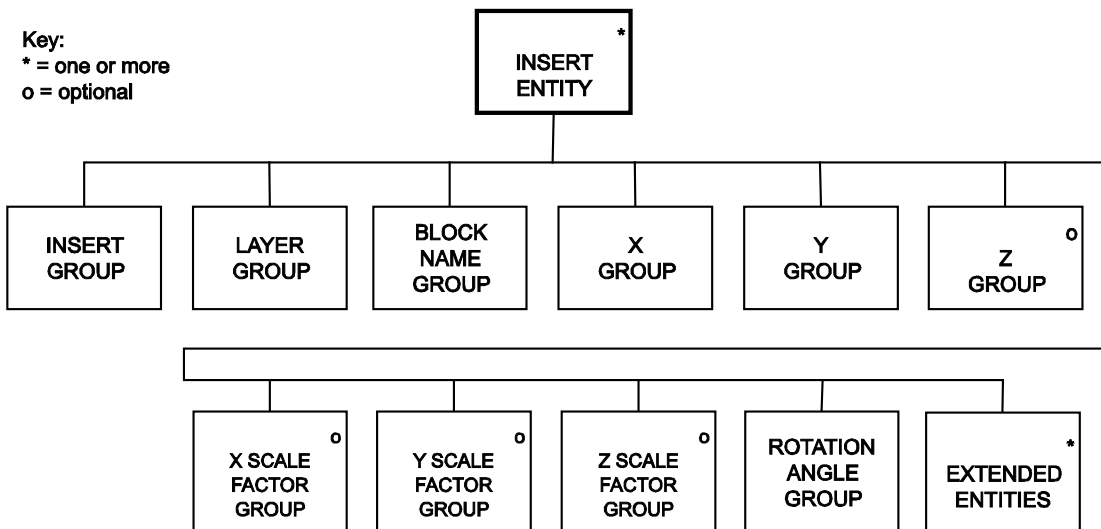


Figure 10m: Level 3

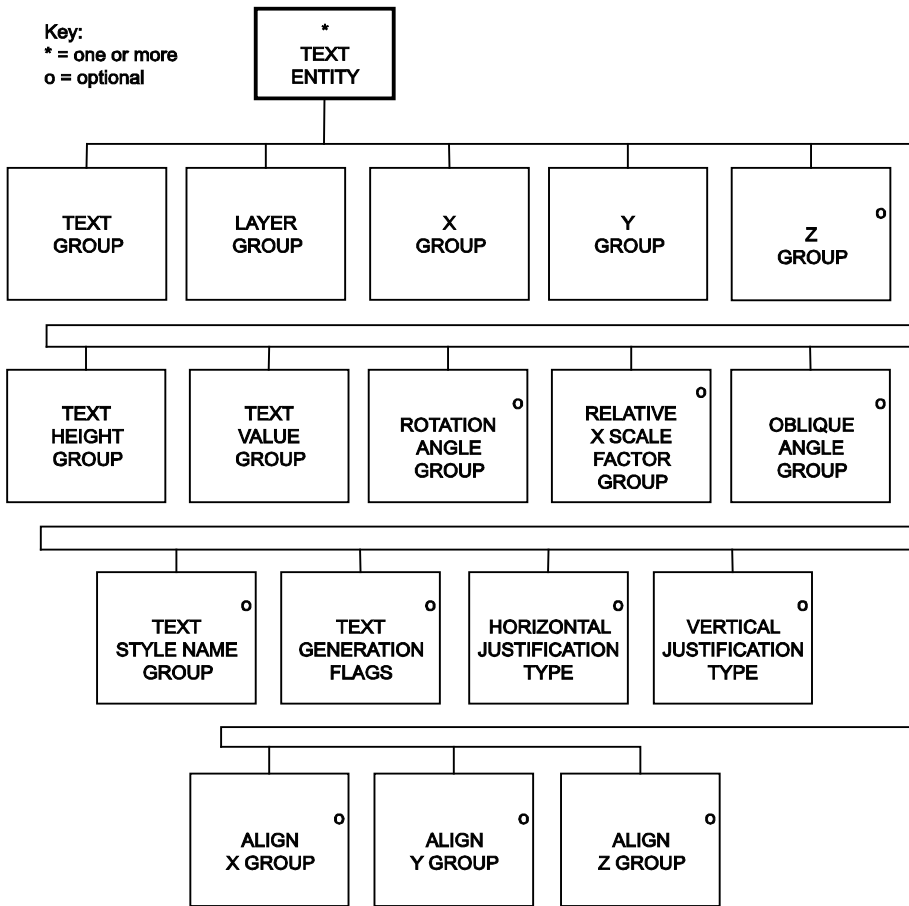


Figure 10n: Level 3


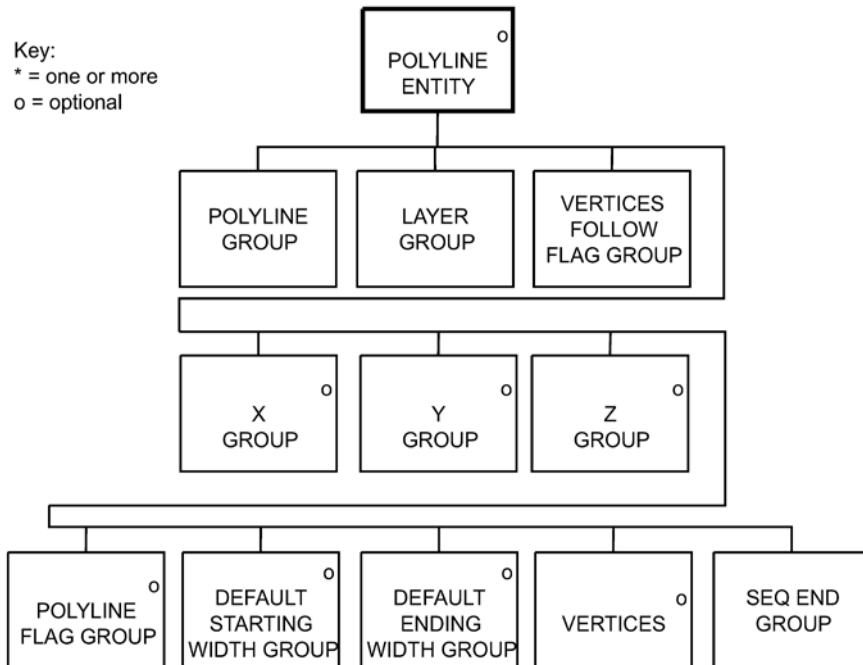


Figure 10p

Figure 10o: Level 3

Key:  
\* = one or more  
o = optional

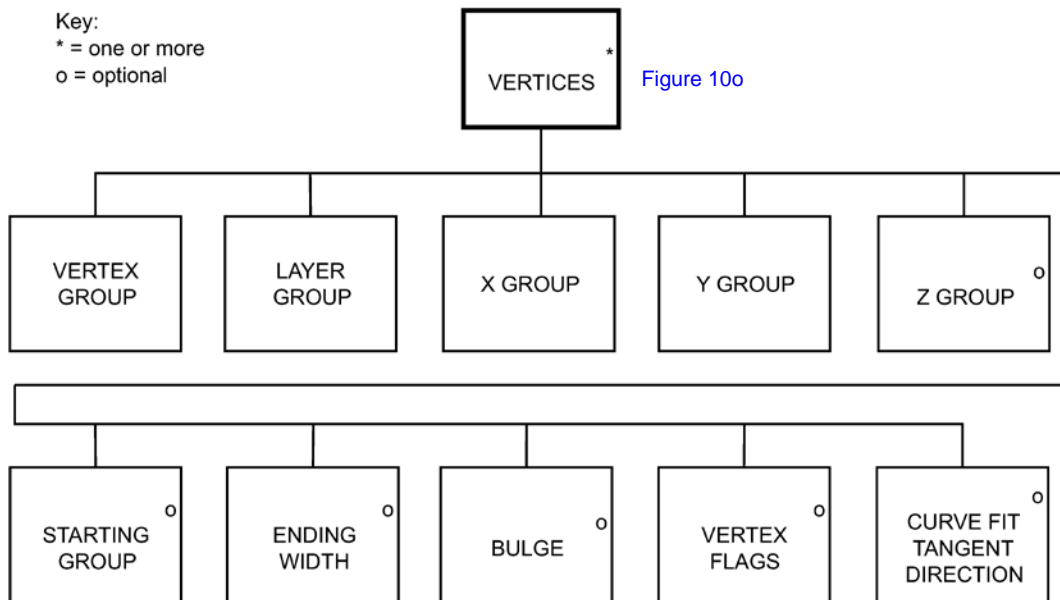

**Figure 10p:** vertex entity (level 4)

### End of File group

This group will end with DXF EOF (End of File) group.


## Chapter 5 An overview of Meridian 2 in MID/MIF

### Meridian 2 is available in MID/MIF

The transfer format is as defined by the MapInfo Professional User's Guide (v8.0): MapInfo Map Interchange Format. MapInfo Interchange Format (MIF) is an ASCII file format that can fully describe a MapInfo database. Both graphic and tabular data are exported into MIF files. The graphic data is in a file with a '.mif' extension, and the tabular data is in a file with a '.mid' extension.

MapInfo Interchange Format files can be translated into other formats with other programs.

An overview of the data structure of a Meridian 2 file in MID/MIF is shown below.

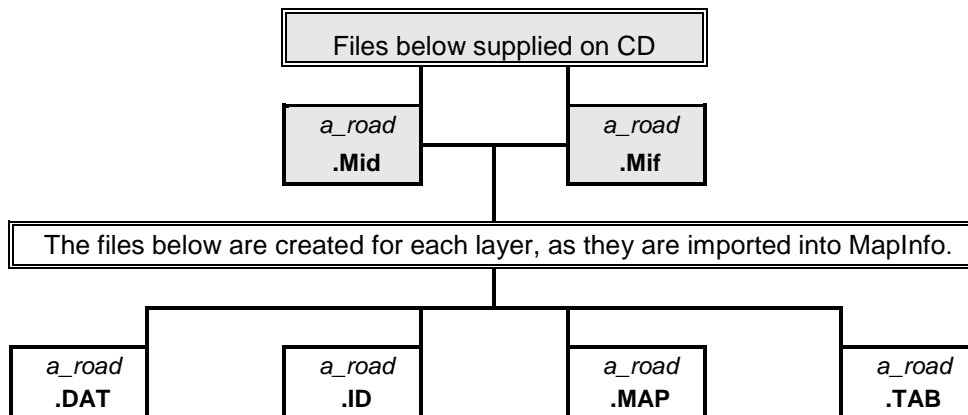

Once this is done, it is ready for use (the above example is for the A road layer).

### Structure of Meridian 2 in MapInfo

Meridian 2 has a limited link and node data structure: within this structure, a feature may be a name, a point or a line (or series of lines forming a coherent unit). Each feature is free-standing; that is, its topological relationship to any other feature is not expressed in the data. Features are classified by type and each type is placed in a separate TAB layer.

*NOTE: road change information only consists of tabular data; that is, it will not have any geographic (map) data.*

#### Line features

A feature is a subjective entity; that is, as long as the constituent lines are the same description (layer), a feature need not fully describe a logical piece of detail.

The extent of a feature is determined by digitising conventions and does not always coincide with the topology. Each linear feature is composed of a string of XY coordinate pairs implicitly joined by straight lines. The line weights for the layers are defined by the parameter file shown in [annexe B](#).

#### Area features

Area features are polygons with attributes added.

#### Names features

Names features are treated as free-standing text data. There is no explicit relationship (in the data) between a text feature and the point or line feature to which it belongs. Ordnance Survey distinguishes between layer name types – for example, place names and station names – by placing each name type in a separate layer. Text has position, expressed as a single coordinate pair held as X and Y offsets from the map origin (south-west corner). If there are any double- or treble-banked names they will be treated as two or three separate features. Anchor points at the bottom-left hand corner and digitising positions define the text string content. Text is oriented; that is, it may run from west to east across the map, or it may be plotted at some angle measured anticlockwise from grid east.

## Drawing content and format

### Coordinate system

The coordinate system is National Grid (NG).

The National Grid coordinates are to a resolution of 0.1 m. This is the resolution of the source data.

### Height

Height information is produced in the form of DTM-style data. Gridded height information is averaged from the 50 m resolution Land-Form PANORAMA dataset to a resolution of 200 m and rounded down to the nearest 1 m value. See [chapter 2](#) in the technical specification.

### Layer names

MapInfo supports long file names. This allows you to use up to 260 characters when naming your file. In addition, any one name within your directory path can be up to 255 characters. You can insert spaces in the file name and long file names can have more than one "." in them. When using more than one ".", you must remember to type in the file extension in order to save the file correctly. For example, you can name a table as follows: \\Meridian2\release.date.dbf.

Layer names were created and set when the original NTF data was translated (number of layers = 20), The Meridian import parameters in the translator highlights a feature code and allocates it to a layer. The logic behind which layer the feature code was allocated to was down to relationship of features.

### Neatline

No neatline.

### Grid

No grid.

### Grid values

No grid values.

### Styling

From January 2013 the MapInfo files have new styling applied, which is hard-coded into the data files. The data is supplied with a *Styling guide*, which explains how customers can manage and alter these styles to suit their needs.

## Chapter 6 An overview of Meridian 2 in ESRI Shapefile

Esri Shapefiles are a simple, non-topological format for storing the geometric location and attribute information of geographic features. A Shapefile is one of the spatial data formats that you can work with in ArcGIS.

The Shapefile format defines the geometry and attributes of geographically-referenced features in as many as five files with specific file extensions that should be stored in the same project workspace. They are:

**.avl** – the file that stores the legend template

**.shp** – the file that stores the feature geometry.

**.shx** – the file that stores the index of the feature geometry.

**.dbf** – the dBASE file that stores the attribute information of features. When a Shapefile is added as a theme to a view, this file is displayed as a feature table.

**.prj** – the file that stores the projection information.

**.sbn** and **.sbx** – the files that store the spatial index of the features. These two files may not exist until you perform theme-on-theme selection, spatial join, or create an index on a theme's shape field. If you have write access to the source data directory, the index files will be persistent and remain after your Esri ArcGIS session is complete. If you do not have write access to the source data directory, they will be removed when you close the project or exit Esri ArcGIS.

The native Shapefile format used by Esri ArcGIS does not support text; text files are supplied, as Shapefile format will become a coverage of points.

Esri ArcGIS will display shapefiles (and Arc coverages) with a random point/line/region/text style each time they are opened. ArcGIS legend files can therefore be created to enable the data to be displayed with the same symbology whenever it is displayed. When using a legend file, it is possible to display the features in a theme based on one of the theme's attributes (this essentially creates a thematic or unique values map). In a unique values map, a different colour is used to symbolise each value in an attribute.

In the case of Meridian 2, the cartographic text theme uses a unique values legend to distinguish place names, station names and water text. All other themes use single symbol legends; that is, all features in the theme will be displayed using the same symbology.

In order for the legend files to work, they must have the same filename as the one to which they correspond; for example, 'motorways.shp' must have a legend file called 'motorways.avl'.

Structure as MID/MIF, see [chapter 5](#).

Drawing content and format as MID/MIF also see [chapter 5](#).

All polygons are represented as single-part features.

### Styling

From January 2013, a Meridian\_2.lyr file is supplied with the data. This enables customers to load Ordnance Survey recommended styles for the product. A *Styling guide* in the Documents folder, supplied with the data, explains how to manage and alter the styles to suit individual requirements.

### Shapefile symbology table

Feature code	Description	Symbol	Legend
FC3000	Motorway	Single	MOTORWAY_L
FC3001	A Road	Single	AROAD_L
FC3002	B Road	Single	BROAD_L
FC3004	Minor Road	Single	MINORROAD_L
FC3500	Road Node, Unspecified	Single	ROADNODE_P/JUNCTION_P / ROUNDAABOUT_P / SETTLEMENT_P
FC3501	Road Edge Node, Unspecified	Single	(not used)
FC6140	Railway	Single	RAILWAYLINE_L
FC6142	Railway (Tunnelled)	Single	RAILWAYLINE_L

<b>Feature code</b>	<b>Description</b>	<b>Symbol</b>	<b>Legend</b>
FC6155	Station, Point	Single	RAILWAYSTN_P
FC6200	Coast	Single	COASTLINE_L
FC6223	Water Feature (River Small)	Single	RIVER_L
FC6224	Water Feature (River Medium)	Single	RIVER_L
FC6225	Water Feature (River Large)	Single	RIVER_L
FC6230	Water Feature (Hidden)	Single	RIVER_L
FC6231	Water Feature (Aqueduct)	Single	RIVER_L
FC6232	Water Feature (Dark Link)	Single	RIVER_L
FC6243	Water Feature (Canal)	Single	RIVER_L
FC6255	Area Water (Lake)	Single	LAKES_A
FC6292	Area Water (Seed)	Single	(not used)
FC6300	DLUA Boundary	Single	DLUA_A
FC6310	DLUA Seed-Point	Single	(not used)
FC6401	County Boundary	Single	ADMINLINE_L / COUNTY_A
FC6403	District Boundary	Single	ADMINLINE_L / DISTRICT_A
FC6405	County/District Boundary	Single	ADMINLINE_L
FC6411	County Seed-Point	Single	(not used)
FC6415	District Seed-Point	Single	(not used)
FC6500	Names	Unique	CARTOTEXT_T
FC6551	Station Name	Unique	CARTOTEXT_T
FC6552	Water Text	Unique	CARTOTEXT_T
FC6663	Woodland Seed	Single	(not used)
FC6664	Woodland Boundary	Single	WOODLAND_A
FC6710	Boundary Node, Unspecified	Single	(not used)
FC6711	Boundary Edge Node	Single	(not used)
FC6720	DLUA Node, Unspecified	Single	(not used)
FC6721	DLUA Edge Node, Unspecified	Single	(not used)
FC6730	Railway Node	Single	(not used)
FC6731	Railway Edge Node	Single	(not used)
FC6740	Coast Node, Unspecified	Single	(not used)
FC6741	Coast Edge Node, Unspecified	Single	(not used)
FC6750	Woodland Node	Single	(not used)
FC6751	Woodland Edge Node	Single	(not used)
FC6762	Height Point Feature	Single	HEIGHT_P
FC6770	Water Feature (Node)	Single	(not used)
FC6771	Area Water (Node)	Single	(not used)
FC6772	Area Water (Edge Node)	Single	(not used)
FC6773	Water Feature (Edge Node)	Single	(not used)
FC6800	Admin Area (Neat Line)	Single	(not used)
FC6801	DLUA (Neat Line)	Single	(not used)
FC6802	Woodland (Neat Line)	Single	(not used)
FC6803	Area Water (Neat Line)	Single	(not used)

## Annexe A Glossary

### **accuracy**

The closeness of the results of observations, computations or estimates to the true values or the values accepted as being true. Accuracy relates to the exactness of the result, and is the exactness of the operation by which the result is obtained.

### **administrative area**

A term used by Ordnance Survey to refer to all public administrative areas, specifically local government management and electoral areas.

### **American Standard Code for Information Interchange (ASCII).**

A seven-bit code for encoding a standard character set.

### **area**

A spatial extent defined by circumscribing lines that form a closed perimeter that does not intersect itself.

### **area seed**

A point within an area that can be used to carry the attributes of the whole area, for example, ownership, address and use type

### **attribute**

An attribute is a property of an entity, usually used to refer to a non-spatial qualification of a spatially referenced entity, for example, a descriptive code indicating what an entity represents or how it should be portrayed.

### **attribute class**

A specific group of attributes, for example, those describing measure, serviceability, structure or composition.

### **attribute code**

An alphanumeric identifier for an attribute type.

### **attribute value**

A specific quality or quantity assigned to an attribute.

### **basic scale**

The scale at which the survey is maintained. For Ordnance Survey mapping, three scales (1:1250, 1:2500 and 1:10 000) are used. Any area is only maintained at one basic scale.

### **block**

Data on magnetic media may be recorded in blocks of characters for more efficient movement within or between computer systems. The length of the block will vary according to the medium and the data transfer format used.

### **boundary**

A boundary is the limit of a predefined and established area whose limit is determined by one or more [lines](#), for example, county area boundary and DLUA boundary.

### **byte**

A unit of computer storage of binary data usually comprising 8 bits, equivalent to a character. Hence [megabyte \(Mb\)](#) and [gigabyte \(Gb\)](#).

### **CAD**

Computer-aided design.

### **cartography**

The organisation and communication of geographically-related information in either graphic or digital form. It can include all stages from data acquisition to presentation and use.

### **character**

A distinctive mark; an inscribed letter; one of a set of writing symbols.



**character string**

A one-dimensional array of characters held either in memory or in another storage medium.

**coding**

Allocation of a feature code to a feature being created from constituent construction data – points and/or segments; with optional linking to an existing feature of the same feature code.

**compact disc-read only memory (CD-ROM)**

A data storage medium. A 12 cm disc similar to an audio CD. Ordnance Survey uses the writable CD, a WORM (write once read many) device. The digital bits are encoded into a vegetable dye and, once written, cannot be erased by overwriting with subsequent data. A laser reads the disc.

**coordinate pair**

A coordinate pair is an easting and a northing.

**coordinates**

Pairs of numbers expressing horizontal distances along original axis. Alternatively, that triplet of numbers measuring horizontal and vertical distances. Row and column numbers of pixels from raw imagery are not considered coordinates for the purpose of the standard.

**copyright**

Copyright is a legal property right that enables the creator of an original work to protect it from unauthorised use. Through the *Copyright, Designs and Patents Act 1988*, Crown copyright continues to subsist in all Ordnance Survey products until the end of the period of 50 years from the end of the year in which they were published, and in the case of data, from the end of the year in which it was extracted from the Ordnance Survey database. Crown copyright is vested in The Controller of Her Majesty's Stationery Office, who has delegated powers to the Director General, Ordnance Survey for the administration of copyright in publications and data, including the determination of terms and conditions under which permission for their reproduction is given.

**currency**

An expression of how up-to-date data is.

**data**

A representation of facts, concepts or instructions in a formalised manner suitable for communication, interpretation or processing.

**data capture**

The encoding of data. In the context of digital mapping, this includes map digitising, direct recording by electronic survey instruments and the encoding of text and attributes by whatever means.

**data format**

A specification that defines the order in which data is stored or a description of the way data is held in a file or record.

**data model**

An abstraction of the real world that incorporates only those properties thought to be relevant to the application or applications at hand. The data model would normally define specific groups of entities and their attributes and the relationship between these entities. A data model is independent of a computer system and its associated data structures. A map is one example of an analogue data model.

**database**

An organised, integrated collection of data stored so as to be capable of use in relevant applications, with the data being accessed by different logical paths. Theoretically, it is application-independent, but in reality it is rarely so.

**dataset**

An Ordnance Survey term for a named collection of logically related features arranged in a prescribed manner; for example, all water features. A dataset has more internal structure than a layer and is related to another dataset only by position.

**density**

A measure of the number of units of data held on a stated length of storage surface.

**detached part**

A term applying to a part of a local government or parliamentary area that is completely surrounded by other local government or parliamentary areas, and is not connected to the parent area by direct access on the ground.

**digital**

Data that is expressed as numbers (digits) in computer-readable form is said to be digital.

**digital map**

Any map sold by Ordnance Survey or its agents in any form; that is, on computer-readable media or as hard copy on paper and/or film or microfilm – produced mainly, or wholly, using computerised means.

**digital map data**

The digital data required to represent a map. The data includes not only map detail but also feature header data, map header data and management data.

**digitising**

The process of converting analogue maps and other sources to a computer-readable form. This may be point digitising, where points are only recorded when a button is pressed on a cursor, or stream digitising where points are recorded automatically at preset intervals of either distance or time as the cursor is traced along a map feature.

**distinctive name**

A text feature consisting of text string(s) that form(s) a proper name.

**DXF (Data Exchange Format)**

A proprietary data format, devised by Autodesk, by which digital drawings may be transferred between users of CAD systems. DXF has become an industry-standard data format and is used for the transfer of some Ordnance Survey data products.

**eastings**

See [rectangular coordinates](#).

**edge match**

The process of ensuring that data along the adjacent edges of map sheets, or some other unit of storage, matches in both positional and attributes terms.

**entity**

Something about which data is stored in a databank or database; for example, building or tree. The data may consist of relationships, attributes, positional and shape information and so on. Often synonymous with feature.

**feature**

An item of detail within a map that can be a point or symbol; a line or text. See also *entity*.

**feature code (FC)**

An alphanumeric attribute code used in digital map data to describe each feature in terms of the object surveyed, its representation on the map, or both.

**feature serial number (FSN)**

A number used as a feature identifier usually allocated on a sequential basis. For example, the order in which features are digitised.

**field**

A specific part of a record containing a unit of data, such as the date of digitising. The unit of data may be a data element or a data item.

**file**

An organised collection of related records. The records on a file may be related by a specific purpose, format or data source – the records may or may not be arranged in sequence. A file may consist of records, fields, words, bytes, characters or bits.

**font**

The style of text character used by a printer or plotter.

**format**

The specified arrangement of data; for example, the layout of a printed document, the arrangement of the parts of a computer instruction or the arrangement of data in a [record](#).

**geographical information system (GIS)**

A system for capturing, storing, checking, integrating, analysing and displaying data that is spatially referenced to the Earth. This is normally considered to involve a spatially-referenced computer [database](#) and appropriate applications software.

**geometric structure**

The ground is modelled in the data as a series of lines and points.

**gigabyte (Gb)**

1 073 741 824 bytes; a measure of data storage capacity.

**grid**

The planimetric frame of reference; for example, the National Grid.

**hard copy**

A print or plot of output data on paper or some other tangible medium.

**junction**

A connection between two or more links at a common node.

**kilobyte (Kb)**

1 024 bytes; a measure of data storage capacity.

**layer**

A subset of digital map data selected on a basis other than position; for example, one layer might consist of all features relating to roads and another to railways.

**line**

A series of connected coordinated points forming a simple feature with homogeneous attribution.

**line feature**

The spatial abstraction of an object in one dimension. Lines may intersect with other lines. They are defined as a series of two or more coordinates and may be curved or straight. Curved lines consist of a series of very short straight-line segments. Lines may be concurrent with other lines under certain conditions. As an object abstraction, a line has no width.

**line segment**

A vector connecting two coordinated points.

**linear feature**

Map feature in the form of a line; for example, road centre-lines that may or may not represent a real-world feature.

**link**

Links are the representation of line features. They are made up of one or more consecutive, non-intersecting, link segments with common attributes, between two terminating nodes. Links have no connection with other links except at the start or end via common (shared) terminating nodes (points). All links contain their terminating coordinates. Links may form the boundaries of polygons and may be shared between polygons. See also [line](#).

**link and node data**

A form of vector data in which linear features are represented as links. Links are terminated where they intersect other links. These intersection points, and link ends, may carry nodes whose feature records express the geometric relationships between links.

**link and node structure**

A data structure in which links and nodes are stored with cross-referencing.

**map**

The representation on a flat surface of all or part of the Earth's surface, intended to be communicated for a purpose or purposes, transforming relevant geographic data into an end-product that is visual, digital or tactile.

**map generalisation**

A reduction in map detail, so that the information remains clear and uncluttered when map scale is reduced. May also involve resampling to larger spacing and/or a reduction in the number of points in a line.

**map header**

Data at the start of the digital map file describing that data. It may contain information on the source and history of the geometric data within the map and the coordinate system in use, as well as holding information essential to the management of Ordnance Survey's digital mapping system.

**map scale**

The ratio between the extent of a feature on the map and its extent on the ground; normally expressed as a representative fraction, for example, 1:1250 or 1:50 000.

**megabyte (Mb)**

1 048 576 bytes; a measure of data storage capacity.

**MID/MIF definition**

MID is a MapInfo database and MIF is a MapInfo Interchange, which is an ASCII file format and is used for export.

Tabular data is held in a file with a *.mid* extension and graphic data is held in a file with a *.mif* extension.

MIF files can be translated into other formats and used with other programmes.

**name or text feature**

The proper name or label of an object (real-world) or feature (object abstraction) consisting of one or more text strings. A name position is defined by a coordinate pair.

**National Grid**

A unique referencing system that can be applied to all Ordnance Survey maps of Great Britain at all scales. It is based on 100 km squares covering the whole of Great Britain based on a Transverse Mercator projection. It is used by Ordnance Survey on all post-war mapping to provide an unambiguous spatial reference in Great Britain for any place or entity whatever the map scale.

**node**

An object representation of a point that either does not form any part of a link (isolated node or polygon seed point); or is the representation of a point at the start or end of a link (terminating node). The position of a node is defined by a single coordinate pair – which is repeated within all links logically connected at that node and/or containing it. A node is only deleted if the link containing it as a terminating node is deleted.

**northings**

See [rectangular coordinates](#).

**orientation**

Orientation of a point or a text feature is measured in degrees anticlockwise from grid east.

**origin**

The zero point in a system of [rectangular coordinates](#).

**packing**

Spaces used as fillers to complete a record or field.

**pecked line**

A line drawn as a series of dashes.

**physical record**

A physical record may be fixed length, containing 80 characters or variable length, containing up to 80 characters.

**point**

A zero-dimensional spatial abstraction of an object represented as a coordinate pair.

**point and line data**

A form of vector data designed for map production in which all map features are designated as points, lines or text. Point and line data does not carry the topological relationships between features.

**point feature**

A zero-dimensional spatial abstraction of an object with its position defined by a coordinate list. Points are represented by nodes, which may be isolated or part of a link (terminating). Points may also be represented by symbols that may have attributes such as rotation and size.

**polygon**

Polygons are a representation of areas. A polygon is defined as a closed line or perimeter completely enclosing a contiguous space and made up of one or more links. At least one node occurs on the perimeter of a polygon where the bounding link completes the enclosure of the area. There may be many nodes connecting the bounding links of a polygon. Links may be shared between polygons. Polygons may wholly contain other polygons, or be contained within other polygons. Each may contain a single isolated node (seed point) that identifies the polygon.

**polygon boundary**

The link or links that enclose a polygon, projected into the horizontal plane.

**polygon point**

See [seed point](#).

**positional accuracy**

The degree to which the coordinates define a point's true position in the world, directly related to the spheroid/projection on which the coordinate system is based.

**precision**

The exactness with which a value is expressed, whether the value be right or wrong.

**record**

A set of related data fields grouped for processing.

**recording format**

The logical and/or physical levels of the protocol governing the laying down of data on the physical transfer medium.

**rectangular coordinates**

Also known as X-Y coordinates and as [eastings](#) and [northings](#). These are two-dimensional coordinates that measure the position of any point relative to an arbitrary origin on a plane surface; for example, a map projection, a digitising table or a visual display unit screen.

**resolution**

A measure of the ability to detect quantities. High resolution implies a high degree of discrimination but has no implication as to [accuracy](#). For example, in a collection of data in which the [coordinates](#) are rounded to the nearest metre, resolution will be 1 m but the accuracy may be  $\pm 5$  m or worse.

**section**

In Ordnance Survey terms, this equates to a single map sheet; that is, a digital map file or a tile.

**seed**

A seed is a digitised point within an area; usually a defined polygon; for example, a lake or woodland, but not always; for example, a geographic seed such as the South Downs.

**seed point**

A coordinated point (an isolated node) within an area (usually a defined polygon) to which alphanumeric information may be attached as an attribute; for example, a name or a feature code. Also known as a polygon seed, area seed or representative point.

**segment**

A chord defined by two consecutive [coordinates](#) in a line string.

**Shapefile or '.shp'**

Esri Shapefiles are a simple, non-topological format for storing the geometric location and attribute information of geographic features. A Shapefile is one of the spatial data formats that you can work with in ArcGIS.

**source scale**

The scale of the source information from which the map was digitised; that is, the scale of survey for a basic-scale map, or the scale of the source map for a derived map.

**spatial data**

Data that includes a reference to a two- or three-dimensional position in space as one of its attributes. It is used as a synonym for geometric data.

**structured data**

Data within which collections of features (of any type) form objects. Topographically-structured data also contains topological information defining the relationships between features and objects.

**terminator**

A character, character string, field, or record used to signal the end of a record, section, volume or database.

**text coordinates**

Each text feature has a start-of-text coordinate that is digitised.

**text feature**

A free-standing text string in the digital data describing a feature, or particular instance of a feature; for example, 'Factory' or 'Acacia Avenue'.

**text height**

The height at which a text string is intended to be plotted out at the nominal map scale. This information is included in the feature header of the text feature.

**text position**

See [text coordinates](#). Also known as *original digitising position*.

**tile**

Broadly synonymous with digital map file, it implies evenly-sized map sheet units.

**topographic database**

A database holding data relating to physical features and boundaries on the Earth's surface.

**topography**

Topography is the study of the physical features of the Earth. A topographic map's principal purpose is to portray and identify the features of the Earth.

**topology**

The study of the properties of a geometric figure that is not dependent on position, such as connectivity and relationships between lines, nodes and polygons.

**transfer format**

The format used to transfer data between computer systems. In general usage this can refer not only to the organisation of data but also to the associated information, such as attribute codes, which are required in order to successfully complete the transfer.

**transfer medium**

The physical medium on which digital data is transferred from one computer system to another; for example, CD-ROM.

**update**

The process of adding to and revising existing digital map data to take account of change.

**vector**

A straight line joining two data points.

**vector data**

Positional data in the form of coordinates of the ends of line segments, points, text positions and so on.

**volume**

A physical unit of the transfer medium, that is, a single disc.

## Annexe B Meridian 2: (MapInfo) MID/MIF layers

This section contains a list of all the valid features used with Meridian 2. The list contains a description of each feature code, its feature name, its feature type and list of the style information required to create an output. Each feature layer then contains other information as attributes.

File	Description	Data type	Feature code
1	motorway	Line	3000
2	a_road	Line	3001
3	b_road	Line	3002
4	minor_rd	Line	3004
5	junction	Node	3500
6	rndabout	Node	3500
7	settlemt	Node	3500
8	roadnode	Node	3500
9	rail_ln	General	6140, 6142
10	station	General	6155
11	county	General	6401
12	district	General	6403
13	coast_ln	General	6200
14	admin_ln	General	6401, 6403, 6405
15	dlua	General	6300
16	text	General	6551, 6500, 6405, 6552
17	river	General	6223, 6224, 6225,6230, 6231,6232, 6243
18	lake	General	6255
19	woodland	General	6664
20	height	Height	6762

### Roads – post 1 January 2000–current; FC 3000 full specification of Roads database, tiles as 10 km by 10 km

Feature code	Feature names	Type	Style
3000	Motorway	Line	Pen (3,2,5278719)
3001	A Road	Line	Pen (2,2,16711680)
3002	B Road	Line	Pen (2,2,16750640)
3004	Minor Road	Line	Pen (1,2,8421504)
3500	Road Standard Node (Motorway junction)	Font Symbol	Symbol (63,7381247,9, "MapInfo Weather",16,0)
3500	Road Standard Node (Roundabout)	Symbol	Symbol (34,8421504,6)
3500	Road Standard Node (Settlement)	Symbol	Symbol (32,16776960,5)
3500	Road Standard Node (Link information)	Font Symbol	Symbol (50,8421504,2, "MapInfo Symbols",0,0)
3501	Road Edge Node	Font Symbol	Symbol (51,8421504,5, "MapInfo Symbols",0,0)



## Administrative areas and coastline

Feature code	Feature names	Type	Style
6401	County polygon	Polygon	Pen (1,2,16776960), Brush (2,13697000,16777215)
6403	District polygon	Polygon	Pen (1,2,16777215), Brush (2,13696976,16777215)
6403	District boundary line	Line	Pen (1,24,0)
6405	County/District boundary line	Line	Pen (1,23,0)
6411	County seed	Symbol	Symbol (34,0,9)
6415	District seed	Symbol	Symbol (34,0,9)
6710	Boundary node unspecified	Symbol	Symbol (34,0,9)
6711	Boundary edge node	Symbol	Symbol (34,0,9)
6800	Admin area (neat line)	Line	Pen (1,2,0)
6200	Coast	Line	Pen (1,2,4227327)
6740	Coast node, unspecified	Symbol	Symbol (34,4227327,9)
6741	Coast edge node, unspecified	Symbol	Symbol (34,4227327,9)

## Developed land use area (DLUA)

Feature code	Feature names	Type	Style
6300	DLUA polygon	Polygon	Pen (1,1,16768208), Brush (2,16762032,16777215)
6310	DLUA seed-point	Symbol	Symbol (34,16768208,9)
6720	DLUA node, unspecified	Symbol	Symbol (34,16768208,9)
6721	DLUA edge node, unspecified	Symbol	Symbol (34,16768208,9)
6801	DLUA (neat line)	Line	Pen (1,2,16768208)

## Railways

Feature code	Feature names	Type	Style
6140	Railway	Line	Pen (2,2,0)
6142	Railway (tunnelled)	Line	Pen (2,3,0)
6155	Station, point	Symbol	Symbol (34,16711680,9)
6731	Railway edge node	Symbol	Symbol (34,16711680,9)
6730	Railway node	Symbol	Symbol (34,16711680,9)

## Cartographic names

Feature code	Feature names	Type	Style
6551	Station name	Text	Font ("Times New Roman")
6500	Place Name	Text	Font ("Arial Names")
6652	Water Text	Text	Font ("Times New Roman")

## Hydrology

Feature code	Feature names	Type	Style
6223	Water feature (river small)	Line	Pen (1,2,4243711)
6224	Water feature (river medium)	Line	Pen (2,2,4243711)
6225	Water feature (river large)	Line	Pen (3,2,4243711)
6230	Water feature (hidden)	Line	Pen (1,3,4243711)
6231	Water feature (aqueduct)	Line	Pen (1,193,4243711)
6232	Water feature (dark link)	Line	Pen (1,3,32896)
6243	Water feature (canal)	Line	Pen (1,2,65535)
6255	Area water (lake polygon)	Polygon	Pen (1,2,65535),Brush (2,11593215,16777215)
6292	Area water (seed)	Symbol	Symbol (49,4227327,12)
6770	Water feature (node)	Symbol	Symbol (49,4227327,12)
6771	Area water (node)	Symbol	Symbol (49,4227327,12)
6772	Area water (edge node)	Symbol	Symbol (49,4227327,12)
6773	Water feature (edge node)	Symbol	Symbol (49,4227327,12)
6803	Area water (neat line)	Line	Pen (1,2,255)

## Woodlands

Feature code	Feature names	Type	Style
6664	Woodland polygon	Polygon	Pen (1,1,32896), Brush (2,11599792,16777215)
6663	Woodland seed	Symbol	Symbol (49,0,12)
6802	Woodland (neat line)	Line	Pen (1,2,32896)
6750	Woodland node	Symbol	Symbol (49,0,12)
6751	Woodland edge node	Symbol	Symbol (49,0,12)

## Height

Feature code	Feature names	Type	Style
6762	Height Point feature	Font Symbol	Symbol (35,12632256,2, "MapInfo Symbols",0,0)

## Roads – prior to 1 January 2000; FC 6000 stripped Roads Database, tiles as 20 km by 20 km

Feature code	Feature names	Type	Style
6001	Motorway [Meridian 1]	Line	Pen (2,2,5278719)
6041	A Road [Meridian 1]	Line	Pen (2,2,16711680)
6061	B Road [Meridian 1]	Line	Pen (2,2,16744448)
6080	Minor Road [Meridian 1]	Line	Pen (1,2,8421504)

## MIF file format

Each MIF file will contain the graphical data relating to one feature type, for example, rivers or motorways. The header will be laid out in the following formats.

Field	Value	Notes
Version	450/300	Indicates the version of the file format used
Charset	"WindowsLatin1"	The character set used, in this case the Windows US and Western Europe character set
Delimiter	“,”	The delimiter character used in quotation marks
CoordSys	Earth Projection 8, 79, "m", -2, 49, 0.9996012717, 400000, -100000 Bounds (0, 0) (700000, 1300000)	Specifies that the data is stored using National Grid, the datum, unit of measurement and so on.
Columns	See, 0, 0 and 0	Specifies the attributes to be used within the data
Data		Indicates the start of the data

### Admin\_In, coast\_In, rail\_In, DLUA, lake, river, woodland and station column definition

Column name	Value
Feature_Code	Smallint
Identifier	Char(13)
Name	Char(70)

### Text column definition

Column name	Value
Feature_Code	Smallint
Name	Char(70)

### County and district column definitions

Column name	Value
Feature_Code	Smallint
Identifier	Char(13)
Name	Char(70)
Admin_Identifier	Integer

### A\_road, b\_road, minor\_rd and motorway column definitions

Column name	Value
Feature_Code	Smallint
OSODR	Char(13)
Route_Number	Char(8)
Road_Name	Char(70)
Length_metres	Integer
Trunk_Indicator	Char(1)

### Gridded height\*

Column name	Value
Feature_Serial_Number Integer	Integer
Feature_Code Integer	Integer
Height Integer	Integer

\* This is a frozen dataset that is replicated by the Digital Product Supply Centre in Ordnance Survey and is for information only; not for production purposes.

## Settlement, junction, rndabout and roadnode column definitions

Column name	Value
Feature_Code	Smallint
OSODR	Char(13)
Junction_Name	Char(40)
Settlemt_Name	Char(50)
Roundabout_Indicator	Char(1)
Link_OSODR	Char(13)
Level	Smallint
Terminal	Char(1)
Number_of_links	Smallint

The data section of the MIF file will follow the header and must start with DATA on the first line.

### Example

```
Version 300
Charset "WindowsLatin1"
Delimiter ","
CoordSys Earth Projection 8, 79, "m", -2, 49, 0.9996012717, 400000, -100000
Bounds (0, 0) (700000, 1300000)
```

```
Columns 3
  Feature_Code Smallint
  Identifier Char(13)
  Name Char(70)
```

```
Data
Point 258249.0001 903901
  Symbol (34,16711680,9)
Point 272489 901968.9998
  Symbol (34,16711680,9)
Point 284855.0002 901251
  Symbol (34,16711680,9)
Point 286192.0002 931625.0002
  Symbol (34,16711680,9)
Point 289091.0001 942497.0003
  Symbol (34,16711680,9)
```